




東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FT-15305-SL 16

光 源	名称 蛍光ランプ
	形 名 FL15EX-N-Z
	光 束 1020 lm × 1

前 面	
反射面	塗装 (白)

保 守 率	良 0.74
	中 0.70
	否 0.61

効 率	F  29%
	F  63%
	F  92%
	器具 光束 934 lm

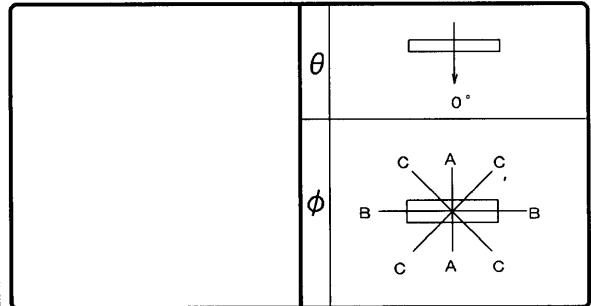

最大取付間隔	
A-A	1.6 H
B-B	1.3 H
備 考	

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	130	130	130
10°	127	130	131
20°	132	123	130
30°	138	110	128
40°	142	94	125
50°	143	74	118
60°	141	52	109
70°	130	31	96
80°	120	13	81
90°	114	0	75
100°	115	0	78
110°	116	0	84
120°	116	0	70
130°	97	0	35
140°	46	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反 射 率 (%)	天 井						70						50						30		20		0	
	壁						70						50						30		10		0	
	床						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	0
室指数	照 明 率 (×0.01)																							
0.60	48	44	35	33	27	26	45	41	33	31	25	25	29	28	23	22	20	20	15	13				
0.80	58	52	44	41	35	33	54	49	41	39	33	32	36	35	30	29	27	26	21	17				
1.00	64	57	50	47	41	39	59	54	47	44	39	37	42	39	35	33	31	30	25	21				
1.25	71	63	57	53	48	45	65	59	54	50	45	43	47	44	40	39	36	35	29	25				
1.50	75	66	62	57	53	49	70	62	58	54	50	47	51	48	44	42	39	38	32	28				
2.00	83	72	71	64	62	57	76	68	66	60	59	54	58	54	52	49	46	44	38	33				
2.50	87	75	77	68	68	61	80	71	71	64	64	59	62	57	56	53	49	47	42	36				
3.00	90	77	81	71	73	65	84	73	76	67	69	62	66	60	60	56	53	50	45	39				
4.00	95	81	87	75	80	70	88	76	81	71	75	67	70	64	66	61	57	54	49	43				
5.00	98	83	91	78	85	74	91	78	85	74	79	70	73	67	69	64	60	57	52	45				
10.00	104	87	100	84	96	82	97	83	93	80	89	78	80	72	78	70	67	63	59	52				

