
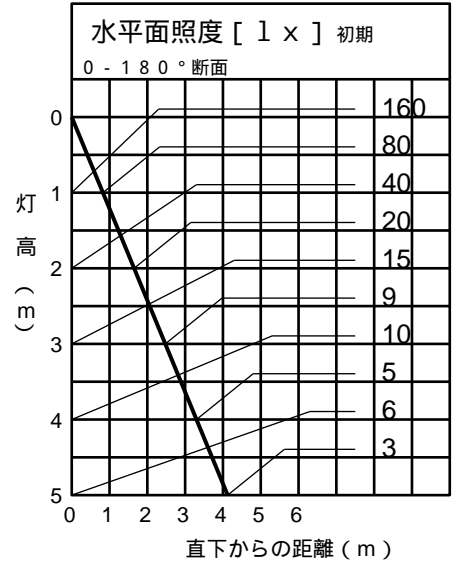
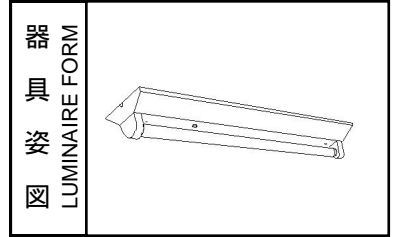


UNIT : cd/1000 lm

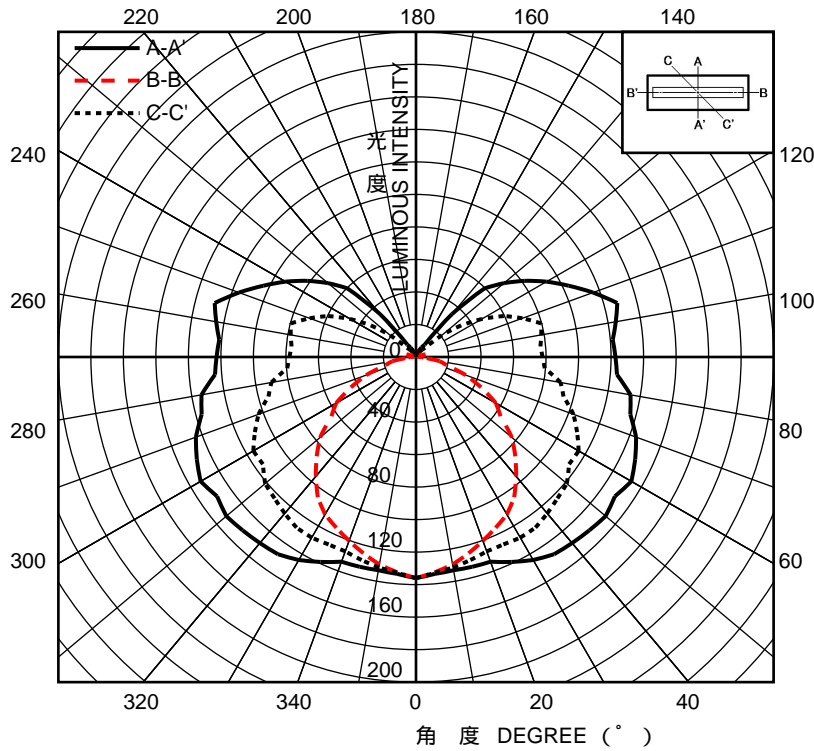

(単位 : %)

反射率 (%) REFLECTANCE	天井	80			70			50			30			0
	壁	70	50	30	70	50	30	70	50	30	70	50	30	0
	床	10			10			10			10			0
室指数 (Kr) ROOM INDEXES	0.60	45	33	25	42	31	24	37	28	22	33	25	20	13
	0.80	53	41	33	50	39	31	44	35	29	38	31	26	17
Kr = $\frac{XY}{H(X+Y)}$	1.00	58	47	39	55	45	38	49	40	34	43	36	31	22
	1.25	63	53	45	60	50	43	53	45	39	47	40	35	25
BZ 7	1.50	68	58	50	64	55	48	57	49	44	50	44	39	29
	2.00	73	64	58	69	61	55	61	55	50	54	49	45	34
最大取付間隔 MAX SPACING	2.50	76	69	63	72	66	60	65	59	54	58	53	49	38
	3.00	79	72	66	75	69	64	67	62	58	60	56	52	41
A-A' 1.65 B-B' 1.20 H	4.00	82	77	72	78	73	69	70	66	63	63	60	57	45
	5.00	84	80	75	80	76	72	72	69	66	65	62	60	48
	7.00	87	83	80	83	79	76	75	72	70	68	65	63	52
	10.00	89	86	84	85	82	80	77	75	73	70	68	66	55

器具形式 LUMINAIRE TYPE	FV20101	器具効率 LUMINAIRE EFFICIENCY	上方 UPPER	26.5 %	配光特性 LUMINOUS INTENSITY DISTRIBUTION
光源形式 LAMP TYPE	FL20SSW/18		下方 LOWER	66.2 %	
光源光束 LAMP FLUX	1230 lm		総計 TOTAL	92.7 %	器具名称 LUMINAIRE DESIGNATION
備考 REMARK	GL 1, GH 1			図番 SHEET NO.	DY001673

