



FH2252

諸特性


光源		FL20SW			
最大取付間隔		A-A		B-B	
		1.50H		1.35H	
器具 効率	上方光束	3.3%			
	下方光束	82.7%			
	計	86.0%			
保守率		良	0.740	中	0.700 否 0.610



配光曲線図 (cd/1000lm)

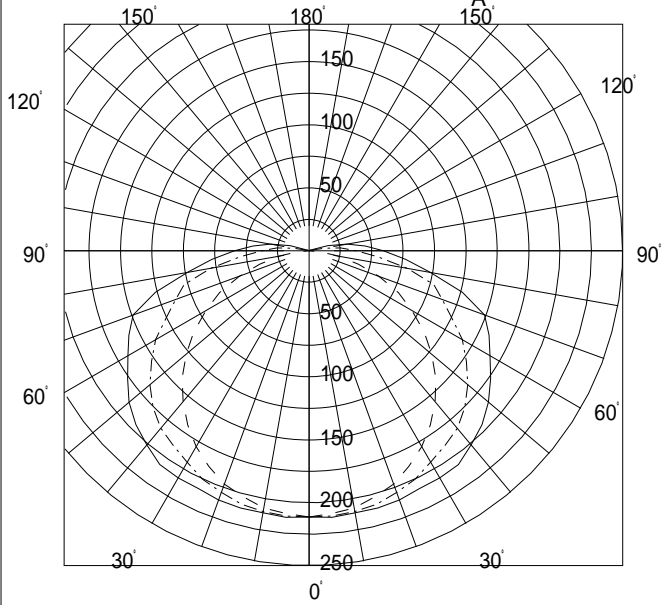

直射水平面照度

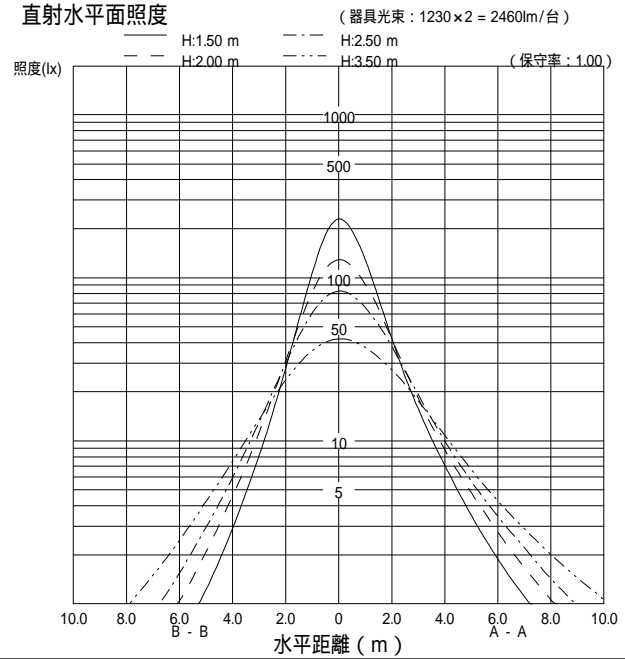

作業面照明率 (× 0.01)

反射率 (%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	36	49	58	65	72	77	84	88	92	96	99	102	105	
		10	33	45	52	58	64	67	73	76	78	82	83	86	88	
	50	30	24	36	44	51	59	64	73	79	83	89	93	97	101	
		10	23	34	41	48	54	58	65	70	73	77	79	83	85	
	30	30	17	28	35	42	50	55	64	71	76	82	87	93	98	
70		10	17	27	34	40	47	51	59	64	67	72	76	80	83	
	10	10	13	22	28	35	41	46	53	59	63	68	72	77	81	
	70	30	34	47	55	62	69	73	80	85	88	92	94	98	100	
		10	32	44	51	56	62	66	71	74	77	80	82	84	86	
	50	30	23	35	43	50	57	62	70	76	80	85	89	94	97	
50		10	22	33	40	47	53	57	64	68	71	75	78	81	84	
	30	30	17	27	35	42	49	54	63	69	73	80	84	90	94	
		10	17	27	33	40	46	51	58	63	66	71	75	79	82	
	10	10	13	22	28	34	41	45	53	58	62	68	71	76	80	
	50	30	22	33	41	47	54	59	66	71	75	79	83	87	90	
30		10	22	32	39	45	51	55	61	66	69	73	75	79	81	
	30	30	16	27	33	40	47	52	59	65	69	75	79	84	87	
		10	16	26	32	39	45	49	56	61	65	69	72	76	79	
	10	10	12	22	28	34	40	45	52	57	61	66	70	74	78	
	30	30	16	26	32	39	45	50	57	62	66	71	74	78	82	
0		10	16	25	32	38	44	48	55	59	63	67	70	74	77	
	0	0	11	19	25	31	37	41	48	53	56	61	65	69	72	