


EL-LYH8002 AHN(65A2)


AHN




○諸特性

光源		LDL110S・N/46/65・A2				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.16m	2.80m	3.44m	4.08m	
	B-B	2.85m	3.24m	3.70m	4.24m	
器具効率	上方光束	下方光束		計		
	1.8%	90.5%		92.3%		
保守率	良い	0.880	普通	0.860	悪い	0.810

○配光曲線図 (cd/1000lm)

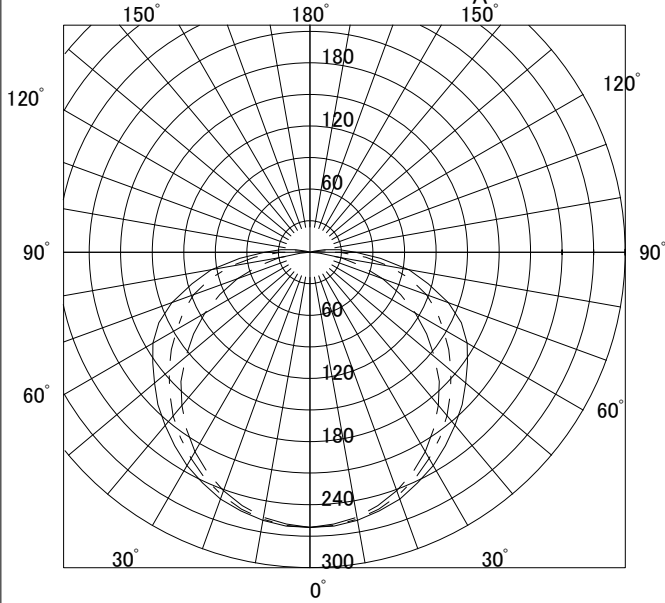

○直射水平面照度

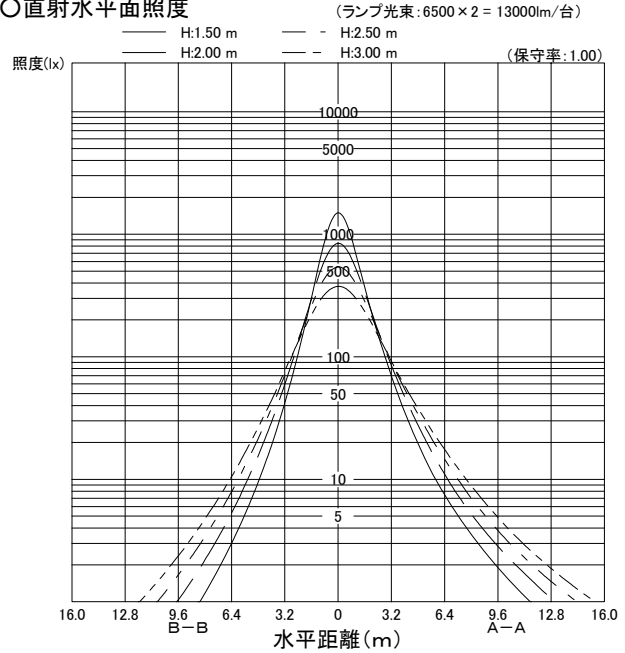

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	40	55	64	72	79	84	92	97	100	105	108	111	114
		10	37	50	58	64	70	74	80	83	86	89	91	93	95
	50	30	27	41	49	58	66	71	80	87	91	97	101	106	110
		10	26	39	46	53	60	65	72	77	80	84	87	90	93
70	70	30	39	53	62	69	76	81	88	93	96	100	103	107	109
		10	36	49	56	63	69	72	78	82	84	87	89	92	94
	50	30	27	40	48	56	64	69	78	84	88	94	98	102	106
		10	26	38	46	52	59	64	71	75	78	83	86	89	92
50	30	30	20	32	40	47	55	61	70	77	81	88	93	98	103
		10	19	31	38	45	52	57	64	70	74	79	82	86	90
	10	10	15	26	33	39	47	51	59	65	69	75	79	84	88
30	30	30	26	38	46	53	61	66	73	79	83	88	91	95	99
		10	25	37	44	51	57	62	68	73	76	80	83	86	89
	10	10	15	26	32	39	46	51	58	63	68	72	77	80	84
0	0	30	19	30	37	44	52	56	64	69	73	79	82	87	90
		10	19	30	37	43	50	54	61	67	70	75	78	82	85
0	0	0	13	24	30	36	43	47	55	60	64	69	73	77	81