



EL-LYV8001 AHN(65A2)

AHN




○配光曲線図 (cd/1000lm)

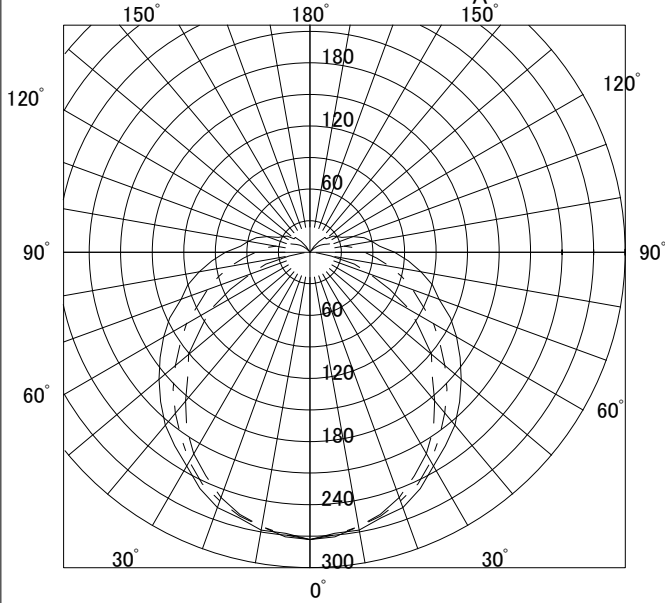

○諸特性

光源		LDL110S-N/46/65-A2				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.09m	2.71m	3.32m	3.94m	
	B-B	2.82m	3.19m	3.62m	4.11m	
器具効率	上方光束	下方光束		計		
	10.7%	89.2%		99.9%		
保守率	良い	0.880	普通	0.860	悪い	0.810

○直射水平面照度

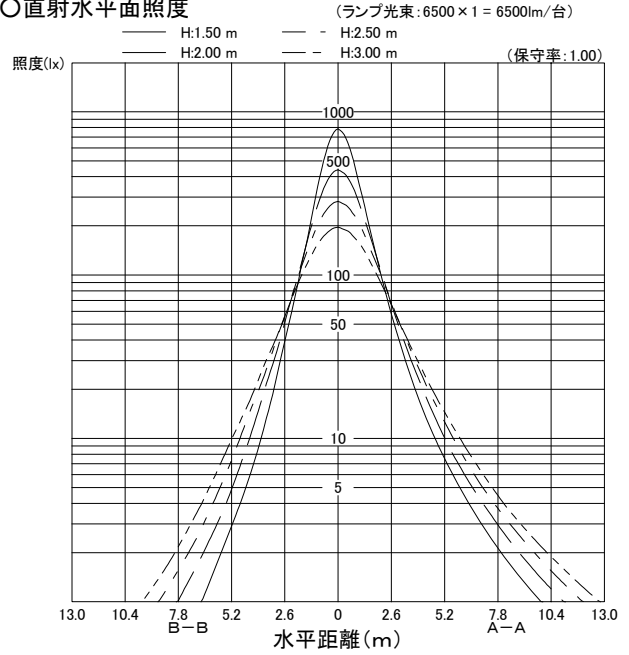

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	43	59	68	77	84	90	97	103	106	111	114	118	121
		10	40	54	62	69	75	79	85	89	91	94	97	99	101
	50	30	29	44	53	62	70	76	85	92	97	103	107	112	117
		10	28	42	50	57	65	69	76	81	85	89	92	96	98
70	30	30	22	35	43	52	60	66	76	83	88	96	101	107	113
		10	22	34	42	49	57	61	69	75	79	84	88	92	96
	50	30	41	56	65	73	81	85	93	98	101	106	108	112	115
		10	39	52	60	66	73	76	82	86	88	92	94	96	98
50	30	30	29	43	51	60	68	73	82	88	93	98	102	107	111
		10	28	41	49	56	63	67	74	79	82	87	90	93	96
	50	30	27	40	48	56	63	68	76	81	85	90	94	98	101
		10	26	39	46	53	60	64	71	75	78	83	85	89	92
30	30	30	21	33	40	48	56	61	69	75	79	85	90	95	99
		10	20	32	39	46	53	58	65	70	74	79	82	86	90
	10	16	27	34	41	48	53	60	66	70	76	79	84	88	
0	30	30	20	31	38	45	53	57	65	70	74	79	83	87	91
		10	20	31	38	44	51	55	62	67	71	76	79	83	86
0	0	0	14	24	30	36	43	47	54	59	63	68	71	75	79