



EL-LYV8022 AHN(65A2)
AHN




○諸特性

光源		LDL110S・N/46/65・A2				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.18m	2.83m	3.48m	4.13m	
	B-B	2.82m	3.19m	3.62m	4.13m	
器具効率	上方光束	下方光束		計		
	13.0%	85.6%		98.6%		
保守率	良い	0.880	普通	0.860	悪い	0.810

○配光曲線図 (cd/1000lm)

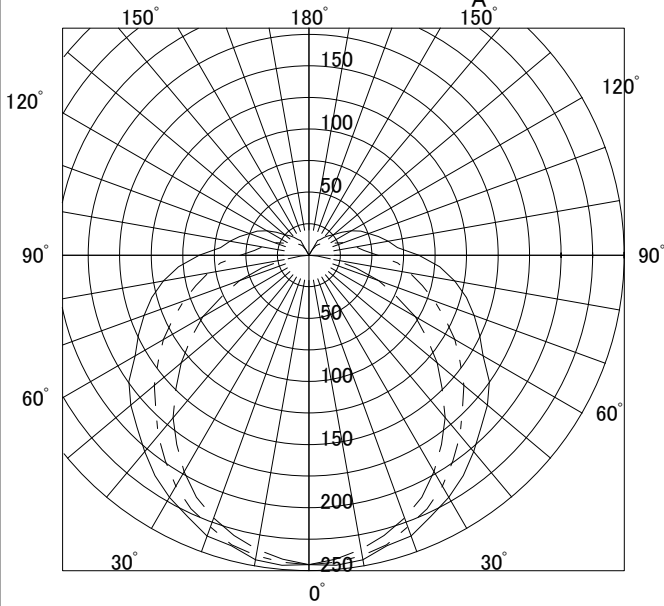

○直射水平照度

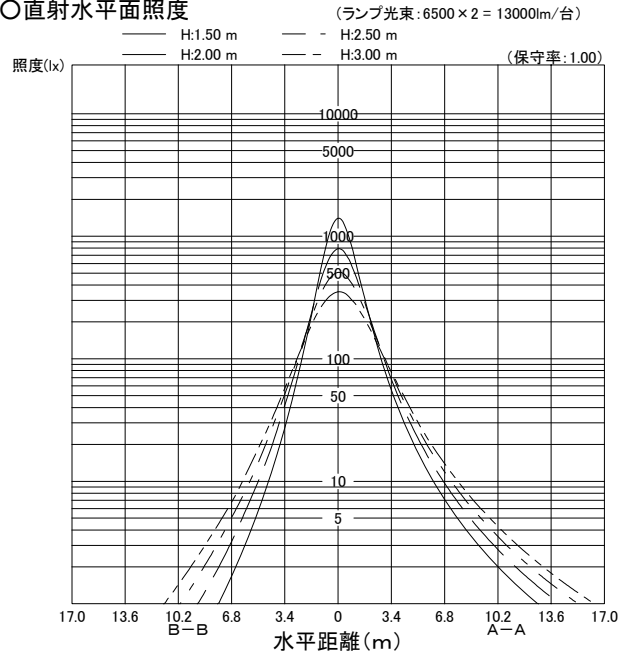

反射率(%)		作業面照明率(×0.01)													
		室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	42	57	66	74	82	87	95	100	104	108	111	115	118
		10	39	52	60	67	73	77	83	86	89	92	94	97	99
	50	30	28	42	51	60	68	74	83	89	94	100	105	110	114
		10	27	40	48	55	62	67	74	79	82	87	90	93	96
70	30	30	21	33	42	49	58	64	73	81	86	93	98	105	110
		10	21	32	40	47	54	59	67	73	77	82	86	90	94
	50	30	16	27	34	41	48	53	61	67	71	78	82	87	91
		10	16	27	34	41	48	53	61	67	71	78	82	87	91
50	70	30	40	54	63	71	78	83	90	95	98	103	106	109	112
		10	38	50	58	64	70	74	80	83	86	89	91	94	96
	50	30	28	41	49	57	65	71	79	85	90	96	100	104	108
		10	27	39	47	54	61	65	72	77	80	84	87	91	94
30	30	30	21	33	40	48	56	62	71	78	82	89	94	100	105
		10	20	32	39	46	53	58	65	71	75	80	83	88	91
	50	30	16	26	33	40	47	52	60	66	70	76	80	85	89
		10	16	26	33	40	47	52	60	66	70	76	80	85	89
0	30	30	26	38	46	53	61	65	73	78	82	87	91	95	98
		10	25	37	44	50	57	61	68	72	76	80	83	86	89
	30	30	20	31	38	45	53	58	66	72	76	82	86	91	96
		10	19	30	37	44	51	55	62	67	71	76	79	83	87
10	30	15	26	32	38	45	50	57	63	67	73	76	81	85	
	10	15	26	32	38	45	50	57	63	67	73	76	81	85	
30	30	19	29	36	43	50	54	61	67	71	76	79	84	87	
	10	18	29	35	42	48	52	59	64	68	72	75	79	83	
10	30	15	25	31	37	44	48	55	61	64	69	73	77	81	
	10	15	25	31	37	44	48	55	61	64	69	73	77	81	
0	0	0	12	22	27	33	40	44	50	55	59	64	67	71	75