


■ 東芝ランプ 配光データシート

名称	ネオハロビーム
形名	JDR110V27W/ K5S-PD
光束	250 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

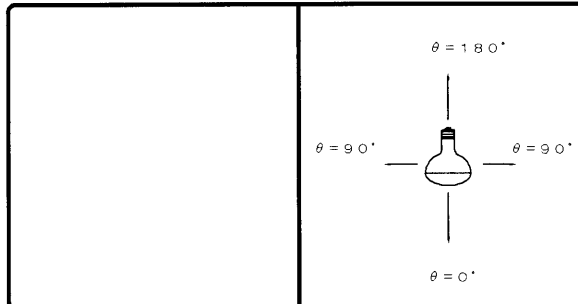

効率	F	%
	F	%
	F	100 %
	器具光束	250 lm

最大取付間隔	
A-A	0.2 H
B-B	0.2 H

備考

光度 (cd/1000lm)		
0°	14000	25° 113
1°	13200	30° 80
2°	12000	35° 93
3°	10800	40° 80
4°	9200	45° 27
5°	7000	50° 0
6°	4200	55° 0
7°	2900	60° 0
8°	1920	65° 0
9°	1400	70° 0
10°	1120	75° 0
11°	880	80° 0
12°	760	85° 13
13°	600	90° 33
14°	480	
15°	380	
16°	320	
17°	273	
18°	240	
19°	180	
20°	173	

反射率 (%)	天井 80						70						50						30						20						0																																																																																																																																																																																													
	壁		70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0																																																																																																																																																																																											
室指数	照明率 (×0.01)																																																																																																																																																																																																																											
0.60	85	78	75	72	70	68	82	76	73	70	68	66	70	67	65	64	63	62	59	57	92	83	82	77	76	73	88	80	80	75	74	71	75	71	70	68	67	65	63	60	97	87	88	81	81	77	92	84	84	79	79	75	79	74	74	72	70	68	65	62	100	89	91	84	85	79	95	86	88	81	82	77	81	76	76	73	71	69	66	62	103	91	94	86	88	82	98	87	90	83	84	79	83	77	78	75	72	70	66	62	107	93	99	89	93	85	101	90	94	86	89	82	85	79	81	77	74	72	68	63	111	95	103	91	97	88	104	91	98	88	93	85	88	81	84	79	76	73	69	64	113	97	107	93	101	90	106	93	101	90	96	87	90	83	87	81	78	75	71	65	117	99	111	96	107	94	109	95	105	93	101	90	93	85	91	84	81	77	73	67	119	101	115	98	111	97	111	96	108	95	105	93	96	87	94	86	83	79	75	69	124	104	122	103	121	103	116	100	115	99	113	99	101	91	100	91	89	84	80	73

