


東芝ランプ 配光データシート

名称	LED電球 一般電球形
形名	LDA11L-G
光束	810 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

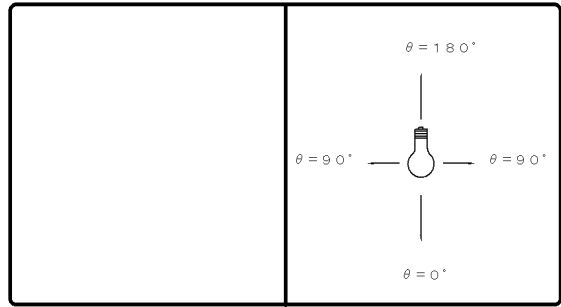

効率	F	%
	F	%
	F	100 %
	器具光束	810 lm

最大取付間隔	
A-A	1.5 H
B-B	1.5 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		105	
10°		106	
20°		106	
30°		107	
40°		107	
50°		107	
60°		106	
70°		103	
80°		98	
90°		91	
100°		83	
110°		74	
120°		65	
130°		55	
140°		46	
150°		38	
160°		29	
170°		15	
180°		0	

反射率 (%)	天井	80						70						50						30		20		0						
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0													
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数		照明率 (×0.01)																												
0.60		52	48	36	34	27	26	48	44	34	32	25	25	29	28	22	21	19	18	13	9									
0.80		61	56	45	42	35	34	56	51	42	40	33	32	36	34	29	28	24	24	18	14									
1.00		69	62	54	50	43	40	64	58	50	46	40	38	42	40	35	33	30	29	22	17									
1.25		76	68	61	56	50	47	70	63	57	52	47	44	48	45	40	39	34	33	27	21									
1.50		82	72	67	61	56	52	75	67	62	57	52	49	53	50	45	43	39	37	31	24									
2.00		90	78	77	69	66	60	83	73	71	64	62	57	60	56	53	50	45	43	36	30									
2.50		95	82	83	73	73	66	87	77	77	69	68	62	65	60	58	55	50	48	41	33									
3.00		99	85	88	77	79	70	91	80	81	73	73	66	69	63	63	58	53	51	44	36									
4.00		105	89	95	82	87	76	96	83	88	77	80	72	74	68	69	63	58	55	49	40									
5.00		108	91	100	86	92	80	99	86	92	80	85	76	78	71	73	67	62	59	52	43									
10.00		116	97	110	93	106	90	106	91	102	88	98	85	86	78	83	75	70	66	60	51									

