


東芝ランプ 配光データシート

名称	LED電球 ミニクリ形
形名	LDA4L-G-E17 /S
光束	250 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

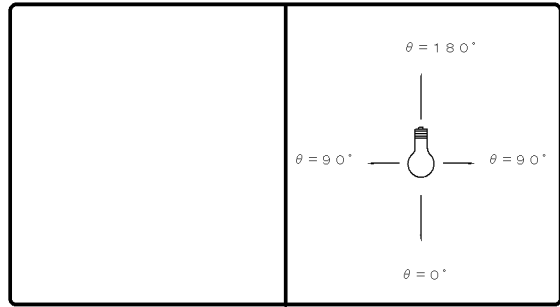

効率	F	%
	F	%
	F	100 %
	器具光束	250 lm

最大取付間隔	
A-A	1.5 H
B-B	1.5 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		139	
10°		138	
20°		137	
30°		135	
40°		132	
50°		127	
60°		120	
70°		111	
80°		100	
90°		87	
100°		74	
110°		59	
120°		45	
130°		31	
140°		1	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20		0						
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0													
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数	照明率 (×0.01)																													
0.60	51	47	36	34	27	26	48	44	34	32	25	25	30	29	23	22	21	20	15	12										
0.80	60	55	45	42	35	33	56	52	42	40	33	32	38	36	30	29	27	26	21	17										
1.00	69	62	53	49	42	40	64	58	50	47	40	38	44	42	36	35	33	32	26	22										
1.25	75	67	60	55	50	46	70	63	57	53	47	44	50	47	42	41	38	37	31	26										
1.50	81	71	66	60	56	52	75	67	63	57	53	49	55	52	47	45	42	41	35	30										
2.00	89	77	76	68	65	60	83	73	71	64	62	57	63	58	55	52	49	47	41	36										
2.50	94	81	82	73	72	65	88	77	77	69	68	62	68	63	61	57	54	52	46	40										
3.00	98	84	87	76	78	69	91	80	82	73	73	67	72	66	65	61	58	55	49	43										
4.00	103	88	94	81	86	75	96	83	88	77	81	72	77	70	71	66	63	60	54	48										
5.00	106	90	98	84	91	79	99	86	92	81	86	76	81	73	76	70	67	63	58	51										
10.00	114	95	109	92	104	88	106	91	102	88	98	85	89	80	86	78	75	71	66	60										

