


東芝照明器具配光データシート

名称	蛍光防犯灯
形名	FK-36011PC-GH15

保守率	良	0.78
	中	0.74
	否	0.70


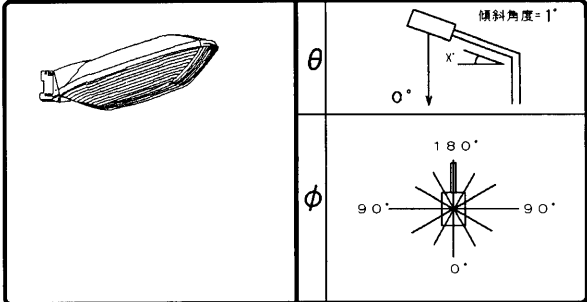


光源	名称	コンパクト形蛍光ランプ
	形名	FPL36EX-N
	光束	2900 lm x 1

効率	F $\frac{1}{2}$	14.1 %
	F $\frac{1}{4}$	70.8 %
	F \bigcirc	84.9 %
	器具光束	2463 lm

備考 ※取付傾斜角：0°

前面	グローブ (プリズム)
反射面	塗装 (白)

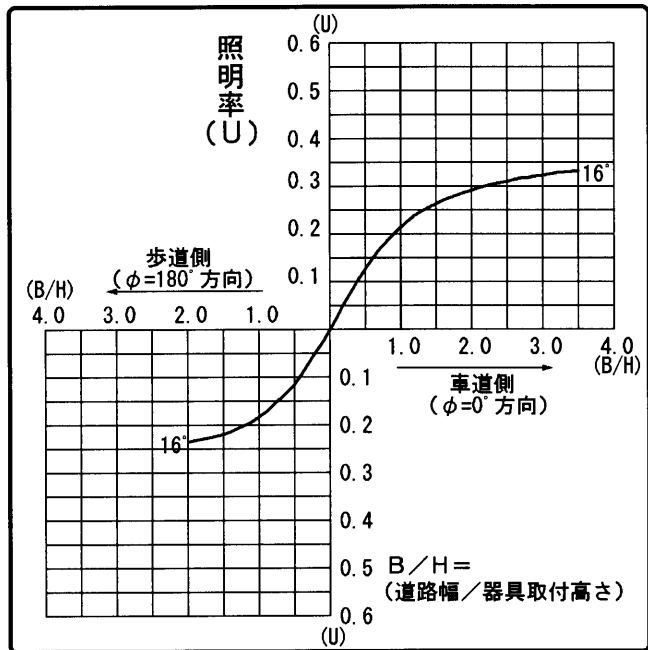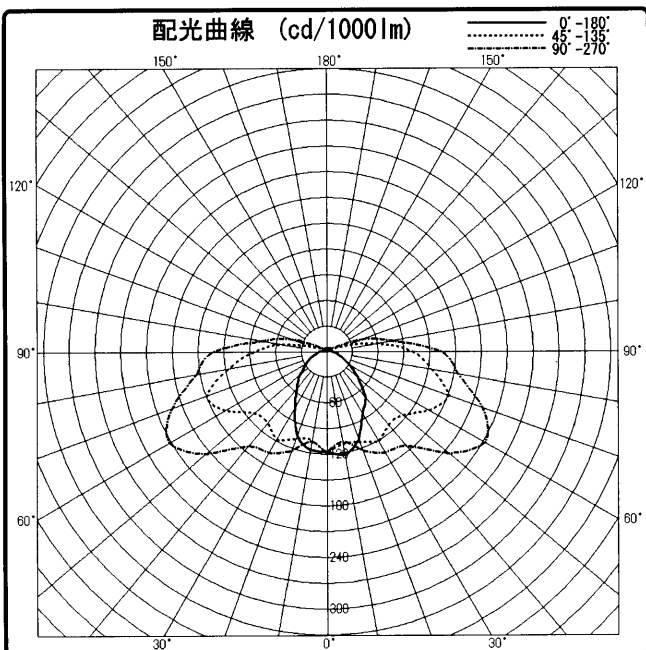

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	117	117	117	117	117
10°	122	109	106	105	116
20°	109	112	123	108	104
30°	83	121	136	118	75
40°	71	112	143	108	56
50°	47	116	185	112	42
60°	31	138	213	137	29
70°	17	151	193	150	21
80°	11	124	154	116	12
90°	7	100	134	85	10
100°	5	60	76	53	8
110°	4	18	43	17	4
120°	5	9	12	10	4
130°	5	6	8	7	5
140°	4	4	6	5	5
150°	5	3	5	5	6
160°	5	6	6	4	4
170°	4	5	5	5	5
180°	0	0	0	0	0

