

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHT-92387M-PN9

光源	名 称	蛍光ランプ
	形 名	FHF86EN/RX
	光 束	9200 lm × 2

前 面	
反射面	塗装 (白)

保守率	良	0.73
	中	0.69
	否	0.61

効 率	F 	20 %
	F 	74 %
	F 	94 %
	器具 光束	17373 lm

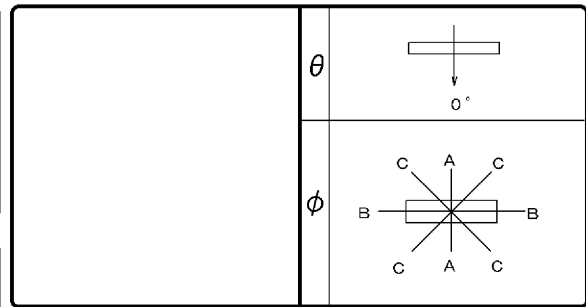

最大取付間隔	
A-A	1.4 H
B-B	1.3 H

備 考	
--------	--

光度 (cd/1000lm)			
θ \ ϕ	A-A	B-B	C-C
0°	174	174	174
10°	170	170	170
20°	168	162	165
30°	164	152	157
40°	158	131	144
50°	157	111	131
60°	145	86	121
70°	142	61	106
80°	121	40	91
90°	81	25	61
100°	68	12	46
110°	62	10	42
120°	59	6	42
130°	57	3	35
140°	43	1	23
150°	24	0	11
160°	9	0	3
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		51	47	37	35	29	28	48	45	35	34	28	27	32	31	26	25	24	23	19	16		
0.80		61	55	47	44	38	36	58	53	45	42	36	35	41	39	33	32	31	30	25	22		
1.00		68	61	53	49	44	41	64	58	51	47	42	40	46	44	39	37	36	35	29	26		
1.25		75	66	61	56	51	48	70	63	58	53	49	46	52	49	45	43	41	40	34	30		
1.50		79	70	66	60	56	52	74	67	63	58	54	50	56	53	49	47	45	44	38	34		
2.00		87	76	75	67	66	60	82	72	71	65	63	58	64	59	57	54	52	50	44	40		
2.50		92	79	81	72	72	65	86	76	77	69	69	63	69	63	62	58	56	54	49	44		
3.00		95	82	86	75	77	69	89	78	81	72	74	67	72	66	66	62	60	57	52	47		
4.00		100	85	92	80	85	75	94	82	87	77	80	72	77	71	72	67	65	62	57	52		
5.00		103	87	96	82	90	78	97	84	91	79	85	75	80	73	76	70	68	65	60	55		
10.00		110	92	106	89	102	86	103	88	99	86	96	83	88	80	85	78	76	72	68	62		

