

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FT-41305-SH 15

光源	名 称	蛍光ランプ
	形 名	FL40SS・EX-N /37-H
	光 束	3 5 6 0 lm × 1

前 面	
反射面	塗装 (白)

保守率	良	0.74
	中	0.70
	否	0.61

効 率	F 	29%
	F 	63%
	F 	92%
	器具 光束	3 2 6 1 lm

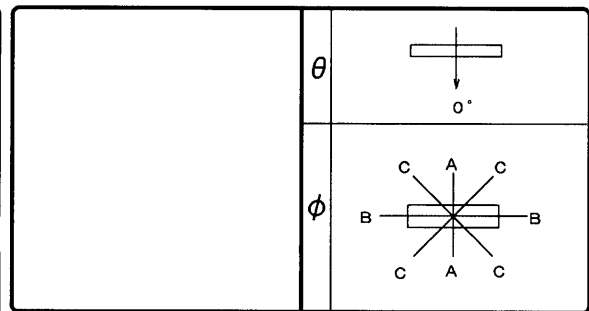

最大取付間隔		備考
A-A	1.6 H	
B-B	1.3 H	

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	130	130	130
10°	127	130	131
20°	132	123	130
30°	138	110	128
40°	142	94	125
50°	143	74	118
60°	141	52	109
70°	130	31	96
80°	120	13	81
90°	114	0	75
100°	115	0	78
110°	116	0	84
120°	116	0	70
130°	97	0	35
140°	46	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		48	44	35	33	27	26	45	41	33	31	25	25	29	28	23	22	20	20	15	13		
0.80		58	52	44	41	35	33	54	49	41	39	33	32	36	35	30	29	27	26	21	17		
1.00		64	57	50	47	41	39	59	54	47	44	39	37	42	39	35	33	31	30	25	21		
1.25		71	63	57	53	48	45	65	59	54	50	45	43	47	44	40	39	36	35	29	25		
1.50		75	66	62	57	53	49	70	62	58	54	50	47	51	48	44	42	39	38	32	28		
2.00		83	72	71	64	62	57	76	68	66	60	59	54	58	54	52	49	46	44	38	33		
2.50		87	75	77	68	68	61	80	71	71	64	64	59	62	57	56	53	49	47	42	36		
3.00		90	77	81	71	73	65	84	73	76	67	69	62	66	60	60	56	53	50	45	39		
4.00		95	81	87	75	80	70	88	76	81	71	75	67	70	64	66	61	57	54	49	43		
5.00		98	83	91	78	85	74	91	78	85	74	79	70	73	67	69	64	60	57	52	45		
10.00		104	87	100	84	96	82	97	83	93	80	89	78	80	72	78	70	67	63	59	52		

