
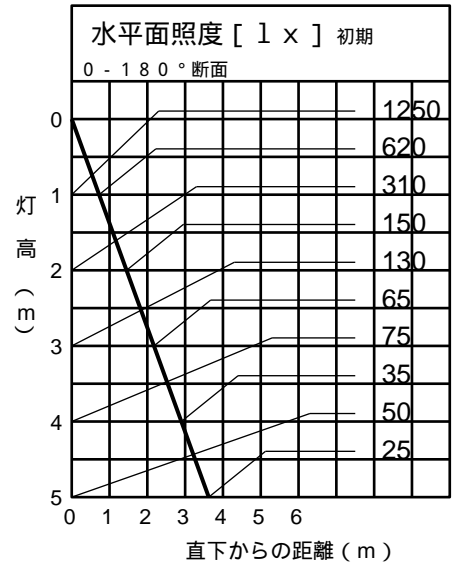
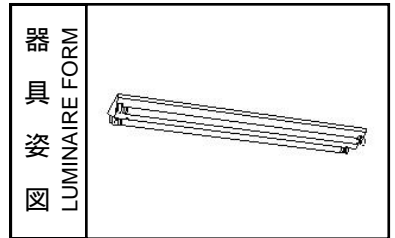


UNIT : cd/1000 lm

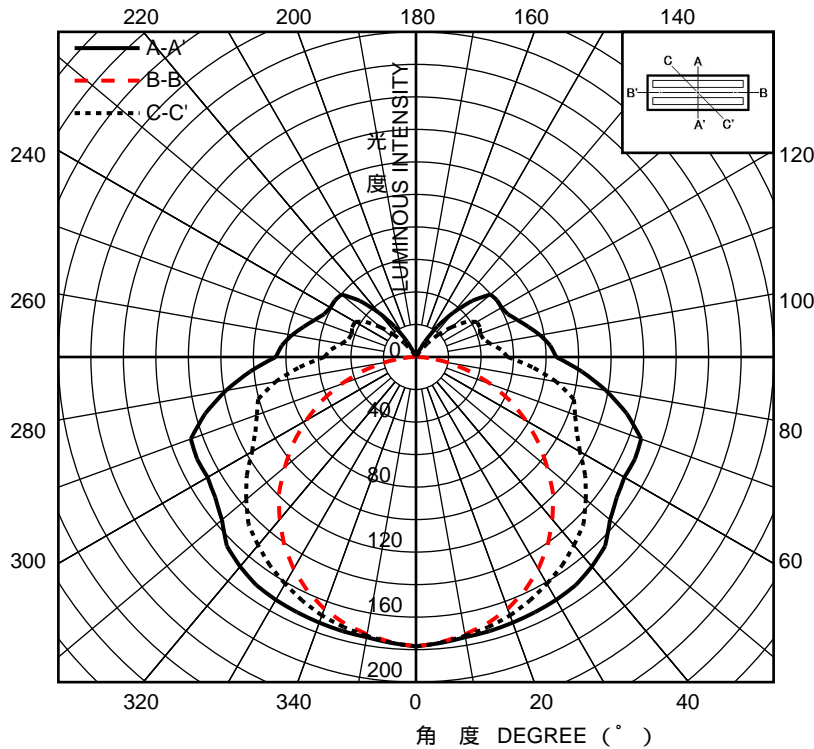

(単位 : %)

反射率 (%) REFLECTANCE	天井	80			70			50			30			0
	壁	70	50	30	70	50	30	70	50	30	70	50	30	0
室指数 (Kr) ROOM INDEXES	床	10			10			10			10			0
	0.60	47	35	27	44	34	27	40	31	25	37	29	23	16
Kr = $\frac{XY}{H(X+Y)}$	0.80	54	43	35	52	41	34	47	38	32	43	35	30	22
	1.00	60	49	42	58	48	40	52	44	38	47	41	35	27
BZ 6	1.25	65	55	47	62	53	46	57	49	43	51	45	40	31
	1.50	70	60	53	66	58	51	61	53	48	55	49	44	35
最大取付間隔 MAX SPACING	2.00	75	67	60	72	64	58	65	59	54	60	55	50	41
	2.50	78	71	65	75	68	63	69	63	59	63	59	55	45
A-A' 1.45 B-B' 1.20 H	3.00	81	74	69	77	72	67	71	66	62	65	61	58	48
	4.00	84	79	74	81	76	72	74	70	67	68	65	62	53
H	5.00	86	82	78	83	79	75	76	73	70	71	68	65	56
	7.00	89	85	82	85	82	79	79	76	74	73	71	69	60
	10.00	91	88	85	87	85	83	81	79	77	75	74	72	63

器具形式 LUMINAIRE TYPE	FHV32201EFN9	器具効率 LUMINAIRE EFFICIENCY	上方 UPPER	18.4 %	配光特性 LUMINOUS INTENSITY DISTRIBUTION
光源形式 LAMP TYPE	FHF32EX-N-H		下方 LOWER	73.7 %	
光源光束 LAMP FLUX	3520 x 2 lm		総計 TOTAL	92.1 %	一般蛍光灯器具
備考 REMARK	PJ 9			図番 SHEET NO.	DY001681

