


東芝照明器具配光データシート

名 称	蛍光灯器具
形 名	FT-04003-GL 15

保 守 率	良	0.74
	中	0.70
	否	0.61

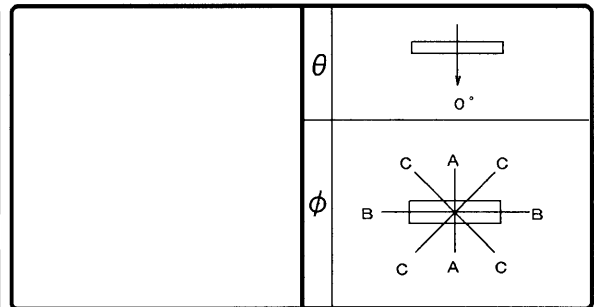

光 源	名 称	蛍光ランプ
	形 名	FL4W
	光 束	110 lm × 1

効 率	F	14 %
	F	74 %
	F	88 %
	器具 光束	96 lm

最大取付間隔	
A-A	1.5 H
B-B	1.2 H

前 面	
反射面	塗装 (白)

備 考	
-----	--

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30			20	0						
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70			50			30			70			50			30			50			30			30			10	0
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数				照 明 率 (×0.01)																														
0°	162	162	162	0.60	47	43	34	32	26	25	45	42	33	31	25	25	30	29	24	23	22	22	18	15										
10°	161	160	161	0.80	57	52	43	40	34	33	54	49	41	39	33	32	38	36	31	30	29	28	24	21										
20°	163	151	158	1.00	63	56	49	46	40	38	59	54	47	44	39	37	43	41	36	35	34	33	28	25										
30°	164	136	152	1.25	70	62	56	52	47	44	66	59	54	50	45	43	49	46	42	40	39	38	33	30										
40°	164	116	144	1.50	74	65	61	56	52	48	70	62	59	54	50	47	53	50	46	44	43	42	36	33										
50°	164	92	136	2.00	81	71	70	62	61	56	77	68	67	60	59	54	60	56	54	51	50	48	43	39										
60°	161	65	126	2.50	86	74	75	67	67	60	81	71	72	64	64	59	65	60	59	55	54	52	47	43										
70°	151	38	115	3.00	89	76	80	70	72	64	84	73	76	67	69	62	68	63	63	58	57	55	50	46										
80°	130	15	93	4.00	93	79	86	74	79	69	88	77	81	72	75	67	73	67	68	63	62	59	55	51										
90°	120	0	81	5.00	96	81	89	77	83	72	91	79	85	74	79	70	76	70	72	66	66	62	58	54										
100°	111	0	65	10.00	103	86	98	83	95	80	97	83	93	80	90	78	84	76	81	73	73	69	66	61										
110°	65	0	29																															
120°	13	0	4																															
130°	0	0	0																															
140°	0	0	0																															
150°	0	0	0																															
160°	0	0	0																															
170°	0	0	0																															
180°	0	0	0																															

