


東芝照明器具配光データシート

名 称	蛍光灯器具
形 名	FT-42005P-G L15

保守率	良	0.74
	中	0.70
	否	0.61

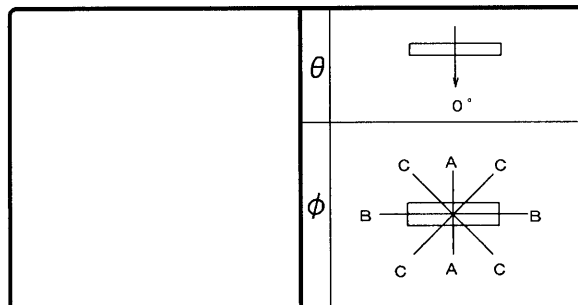

光源	名 称	蛍光ランプ
	形 名	FL40SS・W/37
	光束	3100 lm × 2

効 率	F	23 %
	F	65 %
	F	88 %
	器具 光束	5474 lm

最大取付間隔		備考
A-A	1.5 H	
B-B	1.3 H	

前 面	
反射面	塗装 (白)

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	159	159	159
10°	154	158	159
20°	153	149	154
30°	156	135	148
40°	155	115	140
50°	149	92	128
60°	140	66	114
70°	118	39	95
80°	87	16	65
90°	65	3	43
100°	88	3	58
110°	83	2	54
120°	73	2	46
130°	66	1	40
140°	56	1	29
150°	44	1	24
160°	16	1	12
170°	1	2	2
180°	1	1	1

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		48	44	35	33	28	27	45	42	34	32	26	26	30	29	24	24	22	22	17	15		
0.80		58	52	44	42	36	35	54	49	42	40	34	33	38	36	32	31	29	28	24	20		
1.00		64	57	51	47	42	40	60	54	48	45	40	38	43	41	37	35	33	32	28	24		
1.25		70	62	58	53	49	46	66	59	55	51	47	44	49	46	42	41	38	37	32	28		
1.50		75	66	63	57	54	50	70	62	59	54	51	48	53	50	47	44	42	41	36	31		
2.00		82	71	71	64	63	58	77	68	67	61	60	55	60	56	54	51	48	47	42	37		
2.50		86	74	77	68	69	62	80	71	72	65	65	60	64	59	59	55	52	50	45	40		
3.00		89	77	81	71	74	66	84	73	76	68	70	63	67	62	62	58	56	53	48	43		
4.00		94	80	87	75	80	71	88	76	81	72	76	68	72	66	68	62	60	57	53	47		
5.00		96	82	90	78	85	74	90	78	85	74	80	71	75	68	71	65	63	60	55	50		
10.00		102	86	99	83	95	81	96	82	92	80	90	78	81	73	79	72	69	66	62	56		

