


東芝照明器具配光データシート

名称	蛍光灯器具
形名	FT-22103K-G L15

保守率	良	0.74
	中	0.70
	否	0.61

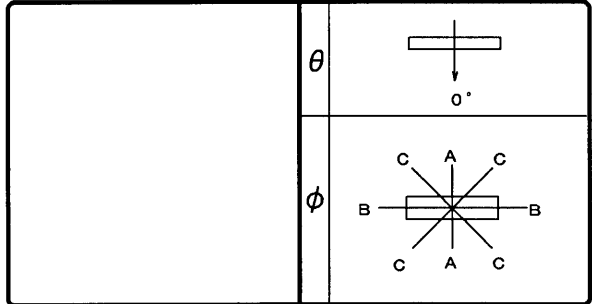

光源	名称	蛍光ランプ
	形名	FL20S・W
	光束	1230 lm × 2

効率	F	2%
	F	75%
	F	77%
	器具光束	1898 lm

最大取付間隔	
A-A	1.4 H
B-B	1.3 H

備考

前面	
反射面	塗装 (白)

θ	ϕ	A-A	B-B	C-C
0°		223	223	223
10°		222	218	220
20°		217	207	213
30°		208	188	200
40°		192	163	180
50°		170	133	154
60°		139	98	125
70°		100	61	88
80°		62	24	49
90°		32	4	20
100°		16	3	7
110°		0	0	0
120°		0	0	0
130°		0	0	0
140°		0	0	0
150°		0	0	0
160°		0	0	0
170°		0	0	0
180°		0	0	0

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30	70	50	30	50	30	50	30	30	10	30	10	10	0			
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0			
室指数		照 明 率 (×0.01)																		
0.60	46	42	35	33	28	27	44	41	34	32	27	27	33	31	27	26	26	26	22	21
0.80	55	50	44	41	36	35	53	49	43	40	36	34	41	39	35	34	34	33	29	28
1.00	61	54	49	46	42	40	58	53	48	45	41	39	46	44	40	38	39	38	34	32
1.25	67	59	56	51	48	45	64	58	54	50	47	45	52	49	46	44	44	43	39	37
1.50	71	62	60	55	53	49	68	61	59	54	52	49	56	52	50	48	48	46	43	41
2.00	77	67	68	61	61	56	74	66	66	60	60	55	62	58	57	54	55	53	49	47
2.50	81	70	73	65	66	60	78	68	71	63	65	59	66	61	62	58	59	56	53	51
3.00	84	72	77	67	71	63	81	70	74	66	69	62	70	64	65	61	62	59	56	54
4.00	88	75	82	71	77	67	84	73	79	70	74	66	74	68	70	65	66	63	60	59
5.00	90	76	85	73	80	70	86	75	82	72	78	69	76	70	73	67	69	66	63	61
10.00	95	79	92	78	89	76	91	78	89	76	86	75	82	74	80	73	75	71	69	67

