

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FT-22103K-S L15

光 源	名称 蛍光ランプ
	形 名 FL20SS・EX-N /18-Z
	光 束 1550 lm × 2

前 面	
反射面	塗装 (白)

保 守 率	良	0.74
	中	0.70
	否	0.61

効 率	F 	2 %
	F 	75 %
	F 	77 %
	器具 光束	2392 lm

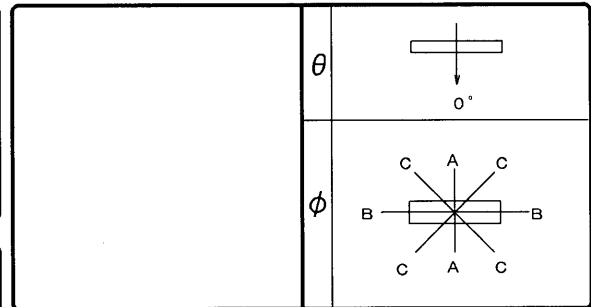

最大取付間隔	
A-A	1.4 H
B-B	1.3 H

備 考	
-----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	223	223	223
10°	222	218	220
20°	217	207	213
30°	208	188	200
40°	192	163	180
50°	170	133	154
60°	139	98	125
70°	100	61	88
80°	62	24	49
90°	32	4	20
100°	16	3	7
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		46	42	35	33	28	27	44	41	34	32	27	27	33	31	27	26	26	26	22	21		
0.80		55	50	44	41	36	35	53	49	43	40	36	34	41	39	35	34	34	33	29	28		
1.00		61	54	49	46	42	40	58	53	48	45	41	39	46	44	40	38	39	38	34	32		
1.25		67	59	56	51	48	45	64	58	54	50	47	45	52	49	46	44	44	43	39	37		
1.50		71	62	60	55	53	49	68	61	59	54	52	49	56	52	50	48	48	46	43	41		
2.00		77	67	68	61	61	56	74	66	66	60	60	55	62	58	57	54	55	53	49	47		
2.50		81	70	73	65	66	60	78	68	71	63	65	59	66	61	62	58	59	56	53	51		
3.00		84	72	77	67	71	63	81	70	74	66	69	62	70	64	65	61	62	59	56	54		
4.00		88	75	82	71	77	67	84	73	79	70	74	66	74	68	70	65	66	63	60	59		
5.00		90	76	85	73	80	70	86	75	82	72	78	69	76	70	73	67	69	66	63	61		
10.00		95	79	92	78	89	76	91	78	89	76	86	75	82	74	80	73	75	71	69	67		

