


EL-LYL8001 AHN(65A2)


AHN




○諸特性

光源		LDL110S・N/46/65・A2				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.14m	2.77m	3.40m	4.02m	
	B-B	2.82m	3.19m	3.63m	4.12m	
器具効率	上方光束	下方光束		計		
	10.7%	88.6%		99.3%		
保守率	良い	0.880	普通	0.860	悪い	0.810

○配光曲線図 (cd/1000lm)

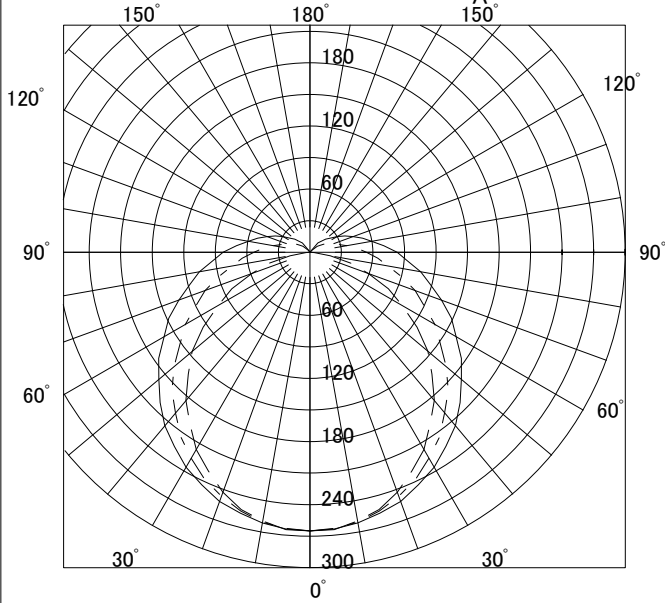

○直射水平面照度

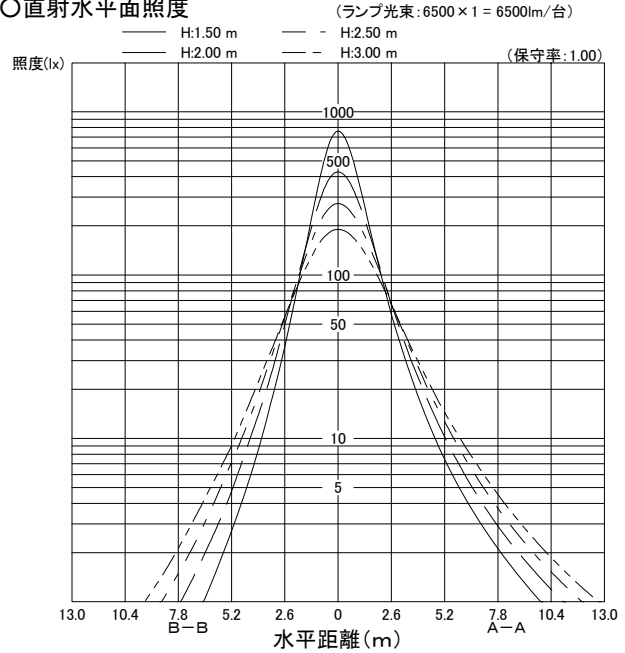

作業面照明率 (× 0.01)

反射率 (%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	43	58	68	76	84	89	97	102	106	110	113	117	120	
		10	40	54	62	68	75	78	84	88	91	94	96	98	100	
	50	30	29	43	53	61	70	76	85	91	96	102	107	112	116	
		10	28	41	49	57	64	69	76	81	84	89	92	95	98	
70	30	30	22	35	43	51	60	66	75	83	88	95	100	107	112	
		10	21	34	41	49	56	61	69	75	78	84	87	92	95	
	50	30	41	56	65	73	80	85	92	97	100	105	108	111	114	
		10	39	52	59	66	72	76	82	85	88	91	93	96	98	
50	30	30	28	42	51	59	67	73	81	88	92	98	102	107	110	
		10	27	40	48	55	62	67	74	79	82	86	89	93	95	
	50	30	30	20	32	40	47	55	60	68	75	79	85	89	94	98
		10	20	32	39	46	53	57	65	70	73	78	82	86	89	
30	30	30	20	31	38	45	52	57	64	70	74	79	82	87	90	
		10	19	30	37	44	51	55	62	67	70	75	78	82	85	
	30	30	20	31	38	45	52	57	64	70	74	79	82	87	90	
		10	16	26	33	39	46	51	58	63	67	72	76	80	84	
0	0	0	13	23	29	36	42	46	53	59	62	67	70	75	78	