

東芝照明器具配光データシート


名称	直管形LEDランプシステム照明器具
形名	LET-42307-L S9

光源	名称	LED (定格出力タイプ)
	形名	LDL40T・N/19/26
	光束	2600 lm × 2

前面	
反射面	塗装 (白)

保守率	良	0.88
	中	0.86
	否	0.81

効率	F	10%
	F	87%
	F	97%
	器具光束	5030 lm

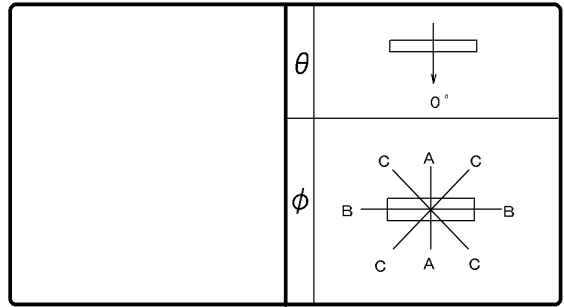

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

備考	
----	--

θ \ φ	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	251	251	251
10°	245	248	247
20°	237	232	236
30°	225	208	218
40°	207	177	194
50°	186	141	166
60°	163	101	136
70°	142	60	108
80°	113	22	84
90°	58	0	38
100°	49	0	30
110°	40	0	23
120°	30	0	15
130°	24	0	12
140°	18	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30	70	50	30	50	30	50	30	30	10	30	10	10	0			
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0			
室指数	照明率 (×0.01)																			
0.60	56	51	42	40	33	32	54	50	41	39	33	32	38	37	31	30	30	29	25	23
0.80	67	61	52	49	43	41	64	59	51	48	42	41	48	46	40	39	39	38	33	30
1.00	74	66	59	55	50	47	70	64	58	54	49	46	54	51	46	45	44	43	38	35
1.25	81	72	67	62	58	54	77	70	65	60	56	53	61	57	53	51	50	49	44	41
1.50	86	76	73	66	63	59	82	73	70	64	61	58	65	61	58	55	55	53	48	45
2.00	94	82	82	74	73	67	90	79	79	72	71	66	73	68	67	63	63	60	55	52
2.50	99	85	88	78	80	72	94	83	85	76	77	70	78	72	72	68	67	65	60	57
3.00	102	88	93	81	85	76	97	85	89	79	82	74	82	76	76	71	71	68	64	60
4.00	107	91	99	86	93	81	102	89	95	84	89	80	87	80	83	76	77	73	69	65
5.00	110	93	103	89	97	85	105	91	99	87	94	83	91	83	86	79	80	76	72	69
10.00	116	97	113	95	109	93	111	95	107	93	104	91	98	89	96	87	88	83	80	76

