

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHR-42858-P K9

光源	名 称	蛍光ランプ
	形 名	FHF32EX-N-H
	光束	4950 lm × 2

前 面	バツフル (白)
反射面	塗装 (白)

保守率	良	0.73
	中	0.69
	否	0.61

効 率	F 	0 %
	F 	74 %
	F 	74 %
	器具 光束	7377 lm

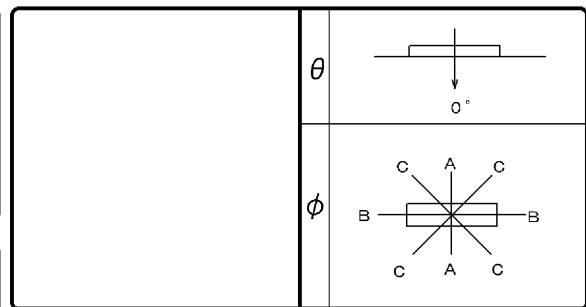

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備 考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	290	290	290
10°	277	283	284
20°	263	261	265
30°	241	230	235
40°	215	192	200
50°	180	149	160
60°	111	102	112
70°	45	53	52
80°	16	18	18
90°	4	1	5
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		48	44	38	36	31	30	47	43	37	35	31	30	36	34	31	30	30	29	26	25		
0.80		57	52	47	44	40	39	56	51	46	44	40	39	45	43	39	38	38	38	34	33		
1.00		63	56	53	49	46	44	61	55	52	48	45	43	50	47	44	43	43	42	39	37		
1.25		68	61	59	54	52	49	66	60	58	53	52	49	55	52	50	48	49	47	44	43		
1.50		72	64	63	57	57	53	70	62	62	57	56	52	59	55	54	52	52	51	48	46		
2.00		78	68	71	63	65	59	76	67	69	62	63	58	65	61	61	58	59	57	54	52		
2.50		82	70	75	66	69	63	79	69	73	65	68	62	69	64	65	61	62	60	57	56		
3.00		84	72	78	68	73	65	81	71	76	68	71	65	72	66	68	63	65	62	60	58		
4.00		87	74	83	71	78	69	84	73	80	71	76	68	75	69	72	67	69	66	64	62		
5.00		89	75	85	73	82	71	86	74	82	72	79	70	77	71	75	69	71	68	66	64		
10.00		93	78	91	77	89	76	90	77	88	76	86	75	82	74	81	73	76	72	70	69		

