


# 東芝照明器具配光データシート

|     |                   |
|-----|-------------------|
| 名 称 | 蛍光灯器具             |
| 形 名 | FHR-42858-P<br>N9 |

|     |   |      |
|-----|---|------|
| 保守率 | 良 | 0.73 |
|     | 中 | 0.69 |
|     | 否 | 0.61 |

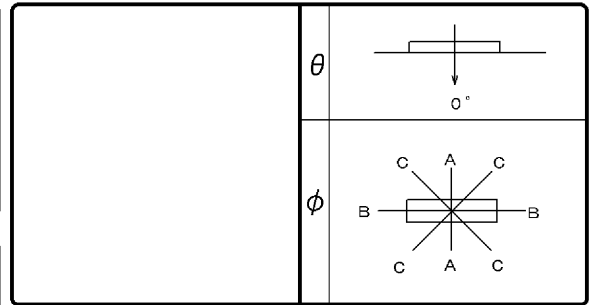

|    |     |             |
|----|-----|-------------|
| 光源 | 名 称 | 蛍光ランプ       |
|    | 形 名 | FHF32EX-N-H |
|    | 光 束 | 3520 lm × 2 |

|        |          |         |
|--------|----------|---------|
| 効<br>率 | F        | 0 %     |
|        | F        | 77 %    |
|        | F        | 77 %    |
|        | 器具<br>光束 | 5454 lm |

| 最大取付間隔 |       |
|--------|-------|
| A-A    | 1.2 H |
| B-B    | 1.2 H |

|     |          |
|-----|----------|
| 前 面 | バツフル (白) |
| 反射面 | 塗装 (白)   |

|        |  |
|--------|--|
| 備<br>考 |  |
|--------|--|

| 光度 (cd/1000lm) |     |     |     |
|----------------|-----|-----|-----|
| θ \ φ          | A-A | B-B | C-C |
| 0°             | 302 | 302 | 302 |
| 10°            | 288 | 295 | 296 |
| 20°            | 273 | 271 | 275 |
| 30°            | 251 | 239 | 245 |
| 40°            | 224 | 199 | 208 |
| 50°            | 187 | 155 | 167 |
| 60°            | 115 | 106 | 116 |
| 70°            | 47  | 55  | 54  |
| 80°            | 16  | 19  | 19  |
| 90°            | 4   | 1   | 5   |
| 100°           | 0   | 0   | 0   |
| 110°           | 0   | 0   | 0   |
| 120°           | 0   | 0   | 0   |
| 130°           | 0   | 0   | 0   |
| 140°           | 0   | 0   | 0   |
| 150°           | 0   | 0   | 0   |
| 160°           | 0   | 0   | 0   |
| 170°           | 0   | 0   | 0   |
| 180°           | 0   | 0   | 0   |

| 反射率<br>(%) | 天井 | 80            |    |    |    |    |    | 70 |    |    |    |    |    | 50 |    |    |    |    |    | 30 |    | 20 | 0 |
|------------|----|---------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
|            | 壁  | 70            |    | 50 |    | 30 |    | 70 |    | 50 |    | 30 |    | 50 |    | 30 |    | 30 |    | 10 | 0  |    |   |
|            | 床  | 30            | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0  |    |   |
| 室指数        |    | 照 明 率 (×0.01) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |   |
| 0.60       |    | 50            | 46 | 39 | 37 | 33 | 32 | 49 | 45 | 38 | 37 | 32 | 31 | 37 | 36 | 32 | 31 | 31 | 31 | 27 | 26 |    |   |
| 0.80       |    | 60            | 54 | 49 | 46 | 42 | 40 | 58 | 53 | 48 | 45 | 42 | 40 | 47 | 44 | 41 | 40 | 40 | 39 | 36 | 34 |    |   |
| 1.00       |    | 65            | 59 | 55 | 51 | 48 | 45 | 63 | 57 | 54 | 50 | 47 | 45 | 52 | 49 | 46 | 44 | 45 | 44 | 40 | 39 |    |   |
| 1.25       |    | 71            | 63 | 61 | 56 | 54 | 51 | 69 | 62 | 60 | 56 | 54 | 51 | 58 | 54 | 52 | 50 | 51 | 49 | 46 | 44 |    |   |
| 1.50       |    | 75            | 66 | 66 | 60 | 59 | 55 | 73 | 65 | 64 | 59 | 58 | 54 | 62 | 58 | 56 | 54 | 55 | 53 | 50 | 48 |    |   |
| 2.00       |    | 81            | 71 | 73 | 66 | 67 | 61 | 79 | 70 | 72 | 65 | 66 | 61 | 68 | 63 | 63 | 60 | 61 | 59 | 56 | 54 |    |   |
| 2.50       |    | 85            | 73 | 78 | 69 | 72 | 65 | 82 | 72 | 76 | 68 | 71 | 64 | 72 | 66 | 68 | 63 | 65 | 62 | 60 | 58 |    |   |
| 3.00       |    | 87            | 75 | 81 | 71 | 76 | 68 | 84 | 74 | 79 | 70 | 74 | 67 | 75 | 69 | 71 | 66 | 68 | 65 | 62 | 61 |    |   |
| 4.00       |    | 91            | 77 | 86 | 74 | 81 | 72 | 88 | 76 | 83 | 73 | 79 | 71 | 78 | 72 | 75 | 70 | 72 | 68 | 66 | 65 |    |   |
| 5.00       |    | 93            | 78 | 89 | 76 | 85 | 74 | 89 | 77 | 86 | 75 | 82 | 73 | 81 | 73 | 78 | 72 | 74 | 70 | 68 | 67 |    |   |
| 10.00      |    | 97            | 81 | 95 | 80 | 92 | 79 | 93 | 80 | 91 | 79 | 89 | 78 | 85 | 77 | 84 | 76 | 79 | 75 | 73 | 72 |    |   |

