


東芝ランプ 配光データシート

名称	ネオハロビーム
形名	JDR110V40W/ K5F
光束	500 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

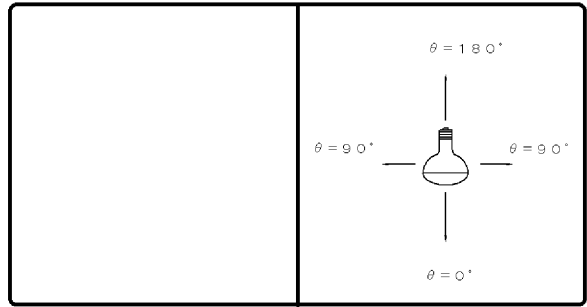

効率	F	%
	F	%
	F	100 %
	器具光束	500 lm

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備考

光度 (cd/1000lm)			
0°	1500	25°	418
1°		30°	306
2°		35°	230
3°		40°	180
4°		45°	130
5°	1384	50°	98
6°		55°	76
7°		60°	56
8°		65°	44
9°		70°	28
10°	1040	75°	20
11°		80°	16
12°		85°	12
13°		90°	8
14°			
15°	806		
16°			
17°			
18°			
19°			
20°	594		

反射率 (%)	天井		80			70			50			30		20	0					
	壁	床	70	50	30	70	50	30	50	30	30	10	0							
室指数	照明率 (×0.01)																			
0.60	72	66	61	58	54	52	70	65	60	57	54	52	59	56	53	52	52	51	48	47
0.80	81	73	70	66	63	60	79	72	69	65	62	60	67	64	61	59	60	59	56	54
1.00	88	79	78	72	71	67	86	78	76	71	70	67	74	70	68	66	67	65	62	61
1.25	93	83	84	77	76	72	91	82	82	76	75	71	79	74	74	70	72	70	67	65
1.50	97	86	88	80	81	75	95	85	86	79	80	75	83	78	78	74	75	73	70	68
2.00	103	90	95	85	88	81	100	88	93	84	87	80	88	82	84	79	81	78	75	73
2.50	107	92	99	88	93	84	103	91	97	87	91	84	92	85	88	82	84	81	78	77
3.00	109	94	103	90	97	87	105	92	100	89	95	86	95	87	91	85	87	83	81	79
4.00	112	96	107	93	103	90	109	94	104	92	100	89	98	90	95	88	91	86	84	82
5.00	115	97	110	95	106	93	111	96	107	94	103	92	101	92	98	90	93	88	86	85
10.00	119	100	117	99	115	98	115	98	113	98	111	97	106	95	104	95	98	93	91	90

