


■ 東芝ランプ 配光データシート

名 称	ネオハロビーム
形 名	JDR110V60W/ K5F
光 束	1000 lm × 1

保 守 率	良	0.91
	中	0.89
	否	0.84

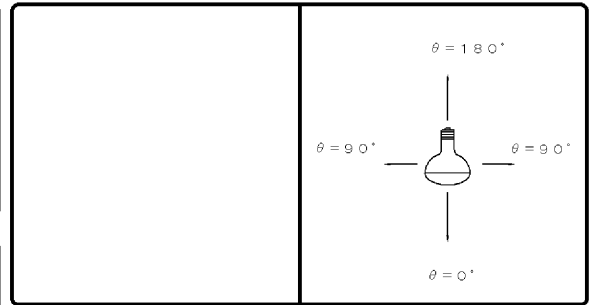

効 率	F	%
	F	%
	F	100 %
	器具 光束	1000 lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備 考	
--------	--

光度 (cd/1000lm)			
0°	1400	25°	415
1°		30°	315
2°		35°	249
3°		40°	188
4°		45°	155
5°	1290	50°	108
6°		55°	74
7°		60°	56
8°		65°	40
9°		70°	33
10°	1120	75°	25
11°		80°	22
12°		85°	20
13°		90°	19
14°			
15°	850		
16°			
17°			
18°			
19°			
20°	578		

反 射 率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数		照 明 率 (×0.01)																						
0.60		74	69	63	60	56	54	73	68	62	59	55	54	60	58	54	53	54	53	49	48			
0.80		84	76	72	68	65	62	82	75	71	67	64	62	69	66	63	61	62	61	57	56			
1.00		92	82	81	75	73	69	89	81	79	74	72	69	77	73	71	68	69	67	64	62			
1.25		97	87	87	80	79	74	95	85	85	79	78	74	82	77	76	73	74	72	68	67			
1.50		102	90	92	83	84	78	99	88	90	82	83	78	86	81	80	77	78	75	72	70			
2.00		108	94	99	88	92	84	104	92	96	87	90	83	92	85	87	82	84	80	77	76			
2.50		111	96	103	91	97	87	108	95	101	90	95	87	96	88	91	85	87	84	81	79			
3.00		114	98	107	94	101	90	110	96	104	93	99	89	98	91	94	88	90	86	83	82			
4.00		118	100	112	97	107	94	113	99	108	96	104	93	102	94	99	91	94	90	87	85			
5.00		120	101	115	99	111	96	116	100	111	98	108	95	105	95	102	94	97	92	90	87			
10.00		125	104	122	103	120	102	120	103	118	102	116	101	110	100	109	99	102	97	95	93			

