


東芝照明器具配光データシート

名 称	東芝LED器具
形 名	LEKT407203N-LS9

効 率	F 	6 %
	F 	94 %
	F 	100 %
	器具 光束	2000 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

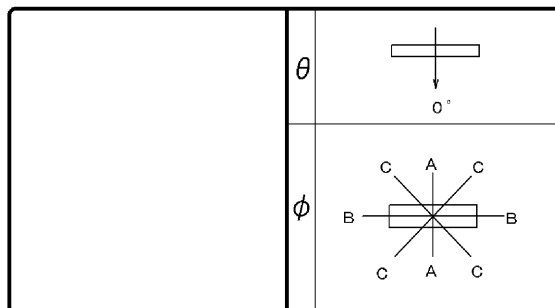

前 面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					固有照明率 (×0.01)																							
0°	301	301	301	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
10°	296	295	295	室指数																								
20°	282	278	280	0.60	60	55	46	43	37	36	58	54	44	42	36	35	42	41	35	34	34	33	29	27				
30°	259	250	255	0.80	72	65	57	54	48	46	69	63	56	53	47	45	53	51	45	44	44	43	38	36				
40°	229	215	222	1.00	79	71	64	60	55	52	76	69	63	59	54	51	59	56	52	50	50	48	43	41				
50°	193	174	183	1.25	86	77	73	67	63	59	83	75	70	65	61	58	66	63	59	56	56	55	50	47				
60°	155	128	142	1.50	91	80	78	71	69	64	88	78	76	70	67	63	71	67	64	61	61	59	54	52				
70°	118	78	100	2.00	100	87	88	79	79	72	95	84	85	77	77	71	80	74	73	69	69	67	62	59				
80°	83	30	62	2.50	104	90	94	83	86	77	100	88	91	81	83	76	85	78	79	74	74	71	67	64				
90°	55	2	34	3.00	108	93	99	87	91	81	103	90	95	85	88	80	89	81	83	77	78	75	71	68				
100°	33	1	18	4.00	113	96	105	91	99	87	108	94	101	89	95	85	94	86	89	82	84	80	76	73				
110°	20	1	10	5.00	116	98	109	94	103	90	111	96	105	92	100	88	97	88	93	85	87	83	79	76				
120°	12	1	7	10.00	122	102	118	100	115	97	117	100	113	98	110	96	104	94	102	92	95	89	87	83				
130°	9	1	6																									
140°	7	1	5																									
150°	6	1	3																									
160°	4	0	2																									
170°	2	1	2																									
180°	1	1	1																									

