
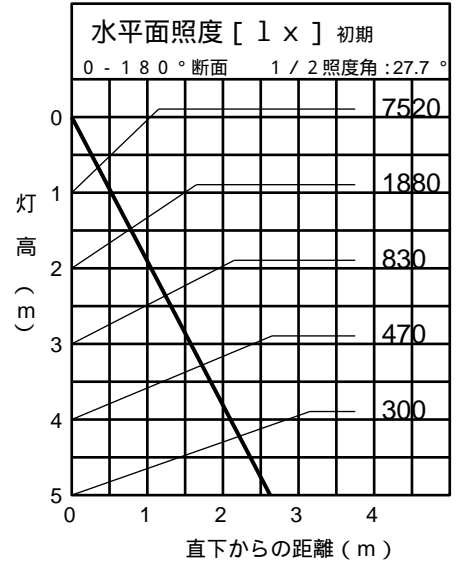
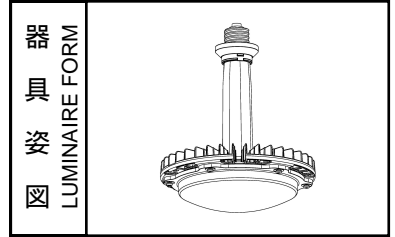


UNIT : cd / 1000 lm

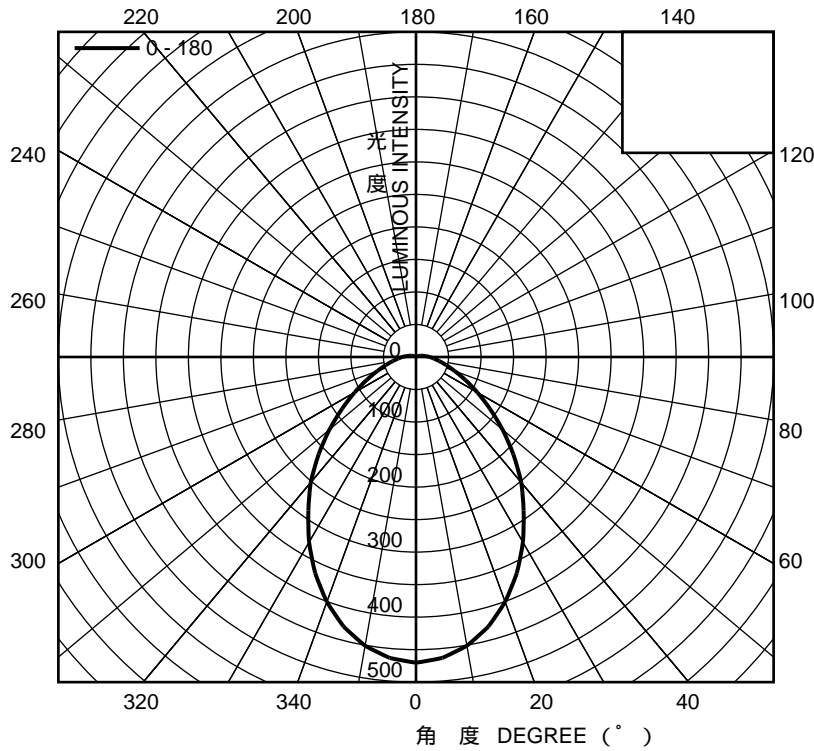

(単位 : %)

反射率 (%) REFLECTANCE	天井	80			70			50			30			0
	壁	70	50	30	70	50	30	70	50	30	70	50	30	0
室指数 (Kr) ROOM INDEXES	床	10			10			10			10			0
	0.60	62	51	44	61	50	44	58	49	43	56	48	42	36
Kr = $\frac{XY}{H(X+Y)}$	0.80	71	61	53	69	60	53	66	58	52	64	57	51	45
	1.00	78	68	61	76	67	61	73	65	60	70	64	59	52
BZ 3	1.25	82	74	67	81	73	66	77	70	65	74	68	64	57
	1.50	87	79	73	85	78	72	81	75	71	78	73	69	63
最大取付間隔 MAX SPACING	2.00	91	85	80	90	84	79	86	81	77	83	79	75	69
	2.50	94	89	84	93	88	83	89	85	81	86	83	79	74
A-A' 1.05 B-B' 1.05 H	3.00	97	92	87	95	90	86	91	88	84	88	85	82	77
	4.00	99	95	92	97	94	91	94	91	88	91	89	86	81
備考 REMARK	5.00	101	98	95	99	96	93	96	93	91	93	91	89	84
	7.00	103	100	98	101	99	97	98	96	94	95	93	92	87
	10.00	104	102	101	103	101	99	99	98	97	96	95	94	89

器具形式 LUMINAIRE TYPE		器具効率 LUMINAIRE EFFICIENCY	上方 UPPER	3.2 %	配光特性 LUMINOUS INTENSITY DISTRIBUTION
光源形式 LAMP TYPE	LDRS140N-W-E39/HBA		下方 LOWER	96.8 %	
光源光束 LAMP FLUX	16000 lm		総計 TOTAL	100 %	LEDアイランプ
備考 REMARK				図番 SHEET NO.	DY003214

内田

今成

関根