
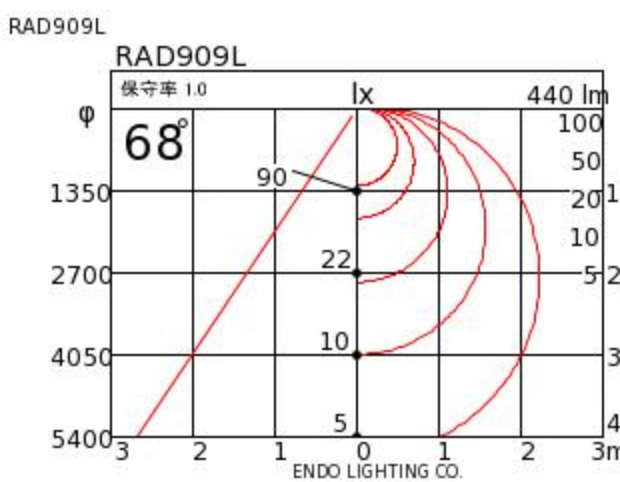


品番 : **RAD909L**
 光源 : E77° E17_2700K_Ra82_DIF_位相制御 (440Lm x1)
 (RAD909L)2700K

光源光束 : 440 Lm
 器具効率 : 1.00
 定格光束 : 440 Lm
 (器具光束)

保守率 良い 0.69
 : 普通 0.66
 劣る 0.63

	0°
0°	205.74
5°	205.09
10°	203.48
15°	200.66
20°	196.69
25°	191.66
30°	185.46
35°	178.19
40°	169.81
45°	160.42
50°	150.2
55°	139.1
60°	127.28
65°	114.91
70°	102.38
75°	89.72
80°	77.86
85°	67.56
90°	59.26
95°	52.91
100°	47.9
105°	43.52
110°	39.41
115°	35.47
120°	31.75
125°	28.22
130°	24.88
135°	21.71
140°	18.69
145°	15.81
150°	13.13
155°	10.66
160°	8.28
165°	6.07
170°	3.67
175°	0.76
180°	0.78

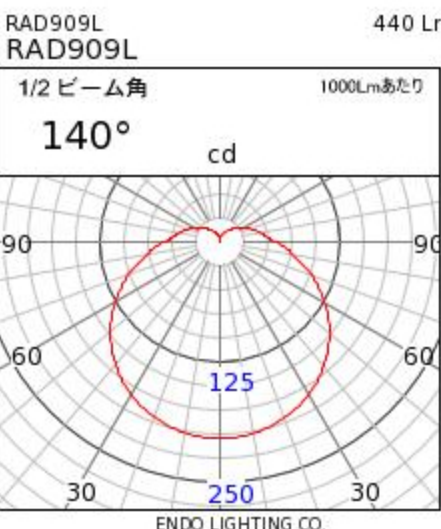

照明率表

天井	70%						50%						30%				0%		
壁	50%		30%		10%		50%		30%		10%		50%		30%		10%		0%
床	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	0%
0.6	0.39	0.38	0.31	0.30	0.25	0.25	0.36	0.35	0.29	0.28	0.24	0.23	0.34	0.32	0.27	0.27	0.22	0.22	0.19
0.8	0.49	0.46	0.39	0.38	0.33	0.32	0.45	0.42	0.37	0.36	0.31	0.30	0.41	0.39	0.34	0.33	0.29	0.29	0.25
1	0.56	0.53	0.47	0.45	0.40	0.39	0.51	0.49	0.43	0.42	0.37	0.37	0.47	0.45	0.40	0.39	0.35	0.35	0.30
1.25	0.64	0.59	0.54	0.51	0.47	0.45	0.58	0.55	0.50	0.48	0.44	0.43	0.53	0.50	0.46	0.45	0.41	0.40	0.35
1.5	0.70	0.64	0.61	0.57	0.53	0.51	0.63	0.59	0.56	0.53	0.50	0.48	0.57	0.55	0.51	0.50	0.46	0.45	0.40
2	0.79	0.71	0.70	0.65	0.63	0.59	0.71	0.66	0.64	0.60	0.58	0.56	0.64	0.61	0.59	0.56	0.54	0.53	0.46
2.5	0.84	0.76	0.77	0.70	0.70	0.65	0.76	0.70	0.70	0.65	0.64	0.61	0.68	0.65	0.64	0.61	0.59	0.57	0.51
3	0.89	0.79	0.82	0.74	0.75	0.69	0.80	0.73	0.74	0.69	0.69	0.65	0.72	0.68	0.67	0.64	0.63	0.61	0.54
4	0.95	0.84	0.89	0.79	0.83	0.75	0.85	0.78	0.80	0.74	0.76	0.71	0.76	0.72	0.73	0.69	0.69	0.66	0.59
5	0.99	0.87	0.93	0.83	0.89	0.79	0.89	0.81	0.84	0.77	0.80	0.74	0.79	0.75	0.76	0.72	0.73	0.70	0.62
10	1.08	0.93	1.05	0.91	1.01	0.89	0.96	0.87	0.94	0.85	0.91	0.83	0.86	0.81	0.84	0.80	0.82	0.78	0.70