



品番 : **RAD910L**  
 光源 : E77°\_E17\_2700K\_Ra82\_DIF\_位相制御 (440Lm x1)  
 (RAD910L)2700K

光源光束 : 440 Lm  
 器具効率 : 1.00  
 定格光束 (器具光束) : 440 Lm

保守率 : 良い 0.69  
 : 普通 0.66  
 : 劣る 0.63

	0°
0°	45.68
5°	54.63
10°	84.49
15°	117.47
20°	136.87
25°	141.57
30°	142.23
35°	145.22
40°	163.82
45°	202.57
50°	197.76
55°	162.42
60°	119.49
65°	96.96
70°	77.24
75°	65.48
80°	53.21
85°	38.58
90°	32.12
95°	31.91
100°	37.93
105°	44.33
110°	47.57
115°	48.94
120°	60.27
125°	73.27
130°	73.36
135°	61.88
140°	57.89
145°	57.42
150°	54.95
155°	41.93
160°	19.18
165°	4.16
170°	1.93
175°	0.69
180°	0.71

RAD910L 440 Lr  
 RAD910L

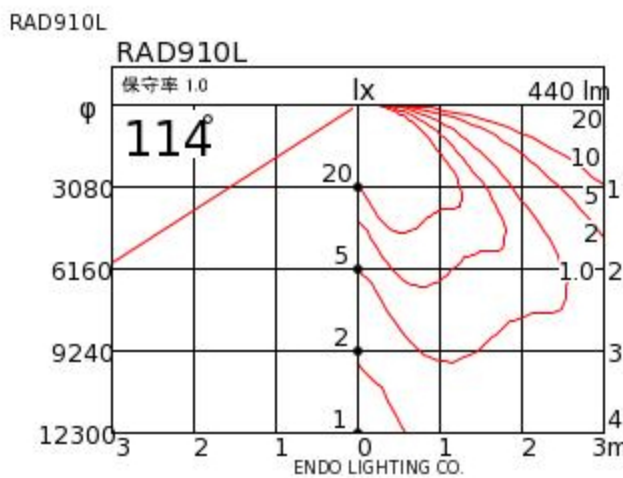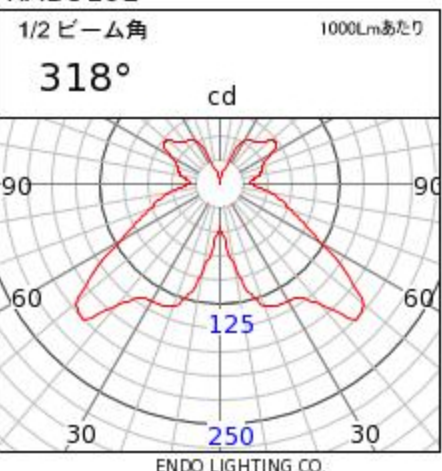

照明率表

天井	70%						50%						30%						0%
壁	50%		30%		10%		50%		30%		10%		50%		30%		10%		0%
床	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	0%
0.6	0.35	0.34	0.27	0.26	0.21	0.21	0.31	0.30	0.24	0.24	0.19	0.19	0.28	0.27	0.22	0.21	0.17	0.17	0.13
0.8	0.45	0.43	0.36	0.35	0.30	0.29	0.40	0.38	0.33	0.32	0.27	0.27	0.36	0.34	0.29	0.29	0.25	0.24	0.19
1	0.53	0.50	0.44	0.42	0.38	0.36	0.47	0.45	0.40	0.38	0.34	0.33	0.42	0.40	0.36	0.35	0.31	0.30	0.25
1.25	0.62	0.57	0.52	0.50	0.46	0.44	0.54	0.51	0.47	0.45	0.41	0.40	0.48	0.46	0.42	0.41	0.37	0.37	0.30
1.5	0.68	0.62	0.59	0.55	0.52	0.50	0.60	0.56	0.53	0.50	0.47	0.46	0.53	0.50	0.47	0.46	0.43	0.42	0.35
2	0.77	0.70	0.69	0.63	0.62	0.58	0.68	0.63	0.61	0.58	0.56	0.54	0.59	0.57	0.55	0.52	0.50	0.49	0.41
2.5	0.83	0.74	0.75	0.69	0.69	0.64	0.73	0.67	0.67	0.63	0.62	0.59	0.64	0.60	0.59	0.57	0.56	0.54	0.45
3	0.87	0.78	0.80	0.73	0.75	0.68	0.76	0.70	0.71	0.66	0.67	0.63	0.67	0.63	0.63	0.60	0.59	0.57	0.48
4	0.93	0.82	0.87	0.78	0.82	0.74	0.81	0.74	0.77	0.71	0.73	0.68	0.71	0.67	0.68	0.65	0.65	0.62	0.53
5	0.97	0.85	0.92	0.81	0.87	0.78	0.85	0.77	0.81	0.74	0.77	0.72	0.74	0.70	0.71	0.67	0.68	0.65	0.56
10	1.05	0.91	1.02	0.89	0.99	0.87	0.92	0.83	0.89	0.81	0.87	0.79	0.80	0.75	0.78	0.74	0.76	0.72	0.62