


# ■ 東芝ランプ 配光データシート

|     |                   |
|-----|-------------------|
| 名 称 | 東芝LED電球ハロゲン形      |
| 形 名 | LDR3L-W-E11<br>/4 |
| 光 束 | 315 lm × 1        |

|             |   |      |
|-------------|---|------|
| 保<br>守<br>率 | 良 | 1.00 |
|             | 中 | 1.00 |
|             | 否 | 1.00 |

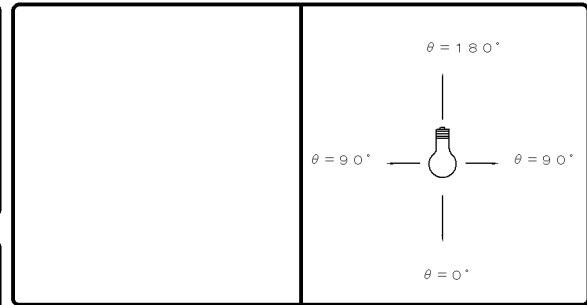

|        |          |        |
|--------|----------|--------|
| 効<br>率 | F        | %      |
|        | F        | %      |
|        | F        | 100 %  |
|        | 器具<br>光束 | 315 lm |

| 最大取付間隔 |       |
|--------|-------|
| A-A    | 0.52H |
| B-B    | 0.52H |

|        |               |
|--------|---------------|
| 備<br>考 | データは初期の標準値です。 |
|--------|---------------|

| 光度 (cd/1000lm) |      |     |     |
|----------------|------|-----|-----|
| 0°             | 2966 | 25° | 392 |
| 1°             | 2960 | 30° | 180 |
| 2°             | 2939 | 35° | 105 |
| 3°             | 2905 | 40° | 62  |
| 4°             | 2859 | 45° | 37  |
| 5°             | 2800 | 50° | 26  |
| 6°             | 2727 | 55° | 21  |
| 7°             | 2642 | 60° | 17  |
| 8°             | 2547 | 65° | 14  |
| 9°             | 2441 | 70° | 10  |
| 10°            | 2325 | 75° | 7   |
| 11°            | 2202 | 80° | 4   |
| 12°            | 2069 | 85° | 2   |
| 13°            | 1926 | 90° | 1   |
| 14°            | 1778 |     |     |
| 15°            | 1626 |     |     |
| 16°            | 1471 |     |     |
| 17°            | 1316 |     |     |
| 18°            | 1165 |     |     |
| 19°            | 1021 |     |     |
| 20°            | 885  |     |     |

| 反射率<br>(%) | 天井 | 80            |     |     |     |     |     | 70  |     |     |     |     |     | 50  |     |     |     | 30  |     | 20  | 0   |
|------------|----|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|            | 壁  | 70            |     | 50  |     | 30  |     | 70  |     | 50  |     | 30  |     | 50  |     | 30  |     | 30  |     | 10  | 0   |
|            | 床  | 30            | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 10  | 0   |
| 室指数        |    | 照 明 率 (×0.01) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0.60       |    | 95            | 87  | 85  | 81  | 80  | 77  | 93  | 86  | 85  | 81  | 79  | 77  | 83  | 80  | 78  | 77  | 78  | 76  | 74  | 73  |
| 0.80       |    | 102           | 93  | 93  | 87  | 87  | 84  | 101 | 92  | 92  | 87  | 87  | 83  | 90  | 86  | 86  | 83  | 84  | 82  | 80  | 79  |
| 1.00       |    | 108           | 97  | 99  | 92  | 93  | 89  | 106 | 96  | 98  | 92  | 93  | 88  | 96  | 91  | 91  | 88  | 89  | 87  | 85  | 84  |
| 1.25       |    | 112           | 99  | 103 | 95  | 97  | 91  | 109 | 98  | 102 | 94  | 96  | 91  | 99  | 93  | 94  | 90  | 92  | 89  | 87  | 86  |
| 1.50       |    | 115           | 101 | 107 | 97  | 101 | 93  | 112 | 100 | 105 | 96  | 99  | 93  | 101 | 95  | 96  | 92  | 94  | 91  | 89  | 87  |
| 2.00       |    | 119           | 103 | 112 | 100 | 106 | 97  | 116 | 102 | 109 | 99  | 104 | 96  | 105 | 97  | 100 | 95  | 97  | 94  | 91  | 90  |
| 2.50       |    | 122           | 105 | 115 | 102 | 110 | 99  | 118 | 104 | 112 | 101 | 108 | 98  | 107 | 99  | 104 | 97  | 100 | 96  | 94  | 92  |
| 3.00       |    | 124           | 106 | 118 | 104 | 113 | 101 | 120 | 105 | 115 | 103 | 111 | 100 | 110 | 101 | 106 | 99  | 102 | 98  | 96  | 94  |
| 4.00       |    | 127           | 108 | 123 | 106 | 119 | 104 | 123 | 107 | 119 | 105 | 116 | 104 | 113 | 103 | 110 | 102 | 105 | 100 | 99  | 97  |
| 5.00       |    | 130           | 110 | 126 | 108 | 123 | 107 | 125 | 109 | 122 | 107 | 119 | 106 | 115 | 105 | 113 | 104 | 108 | 102 | 101 | 99  |
| 10.00      |    | 134           | 112 | 133 | 112 | 132 | 112 | 130 | 111 | 129 | 111 | 128 | 111 | 121 | 109 | 120 | 109 | 113 | 107 | 106 | 104 |

