


■ 東芝ランプ 配光データシート

名 称	東芝LED電球ハロゲン形
形 名	LDR3W-W-E11 /4
光 束	325 lm × 1

保 守 率	良	1.00
	中	1.00
	否	1.00

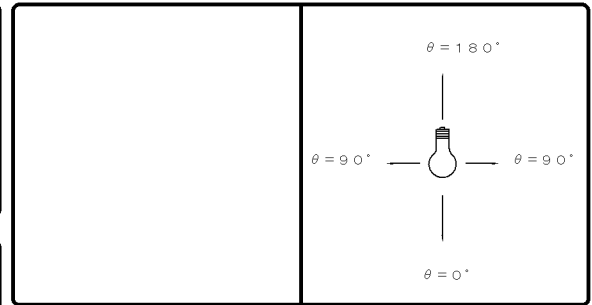

効 率	F 半		%
	F 半		%
	F 全	100	%
	器具 光束	325	lm

最大取付間隔	
A-A	0.52H
B-B	0.52H

備 考	データは初期の標準値です。
--------	---------------

光度 (cd/1000lm)			
0°	2966	25°	392
1°	2960	30°	180
2°	2939	35°	105
3°	2905	40°	62
4°	2859	45°	37
5°	2800	50°	26
6°	2727	55°	21
7°	2642	60°	17
8°	2547	65°	14
9°	2441	70°	10
10°	2325	75°	7
11°	2202	80°	4
12°	2069	85°	2
13°	1926	90°	1
14°	1778		
15°	1626		
16°	1471		
17°	1316		
18°	1165		
19°	1021		
20°	885		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		95	87	85	81	80	77	93	86	85	81	79	77	83	80	78	77	78	76	74	73		
0.80		102	93	93	87	87	84	101	92	92	87	87	83	90	86	86	83	84	82	80	79		
1.00		108	97	99	92	93	89	106	96	98	92	93	88	96	91	91	88	89	87	85	84		
1.25		112	99	103	95	97	91	109	98	102	94	96	91	99	93	94	90	92	89	87	86		
1.50		115	101	107	97	101	93	112	100	105	96	99	93	101	95	96	92	94	91	89	87		
2.00		119	103	112	100	106	97	116	102	109	99	104	96	105	97	100	95	97	94	91	90		
2.50		122	105	115	102	110	99	118	104	112	101	108	98	107	99	104	97	100	96	94	92		
3.00		124	106	118	104	113	101	120	105	115	103	111	100	110	101	106	99	102	98	96	94		
4.00		127	108	123	106	119	104	123	107	119	105	116	104	113	103	110	102	105	100	99	97		
5.00		130	110	126	108	123	107	125	109	122	107	119	106	115	105	113	104	108	102	101	99		
10.00		134	112	133	112	132	112	130	111	129	111	128	111	121	109	120	109	113	107	106	104		

