


# 東芝ランプ 配光データシート

|    |               |
|----|---------------|
| 名称 | 東芝LED電球       |
| 形名 | LDA13N-G/10OW |
| 光束 | 1520 lm × 1   |

|     |   |      |
|-----|---|------|
| 保守率 | 良 | 1.00 |
|     | 中 | 1.00 |
|     | 否 | 1.00 |

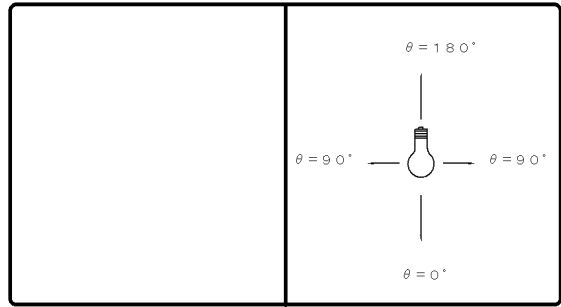

|    |      |         |
|----|------|---------|
| 効率 | F    | %       |
|    | F    | %       |
|    | F    | 100 %   |
|    | 器具光束 | 1520 lm |

|        |       |
|--------|-------|
| 最大取付間隔 |       |
| A-A    | 1.5 H |
| B-B    | 1.5 H |

備考

| 光度 (cd/1000lm)          |     |     |     |
|-------------------------|-----|-----|-----|
| $\theta \setminus \phi$ | A-A | B-B | C-C |
| 0°                      | 116 |     |     |
| 10°                     | 113 |     |     |
| 20°                     | 113 |     |     |
| 30°                     | 113 |     |     |
| 40°                     | 112 |     |     |
| 50°                     | 110 |     |     |
| 60°                     | 106 |     |     |
| 70°                     | 100 |     |     |
| 80°                     | 93  |     |     |
| 90°                     | 84  |     |     |
| 100°                    | 75  |     |     |
| 110°                    | 65  |     |     |
| 120°                    | 55  |     |     |
| 130°                    | 45  |     |     |
| 140°                    | 36  |     |     |
| 150°                    | 28  |     |     |
| 160°                    | 22  |     |     |
| 170°                    | 0   |     |     |
| 180°                    | 0   |     |     |

| 反射率 (%) | 天井          | 80 |     |    |     |    |     | 70 |    |    |    |    |    | 50 |    |    |    |    |    | 30 |  | 20 |  | 0 |
|---------|-------------|----|-----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|----|--|---|
|         | 壁           | 70 | 50  | 30 | 70  | 50 | 30  | 70 | 50 | 30 | 50 | 30 | 50 | 30 | 30 | 10 | 0  |    |    |    |  |    |  |   |
| 床       | 30          | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0  |    |    |    |  |    |  |   |
| 室指数     | 照明率 (×0.01) |    |     |    |     |    |     |    |    |    |    |    |    |    |    |    |    |    |    |    |  |    |  |   |
| 0.60    | 50          | 46 | 36  | 34 | 27  | 26 | 46  | 43 | 33 | 32 | 25 | 25 | 29 | 28 | 22 | 22 | 20 | 19 | 14 | 11 |  |    |  |   |
| 0.80    | 60          | 54 | 45  | 42 | 35  | 34 | 55  | 51 | 42 | 40 | 33 | 32 | 37 | 35 | 29 | 29 | 26 | 25 | 20 | 16 |  |    |  |   |
| 1.00    | 67          | 60 | 52  | 48 | 42  | 39 | 61  | 56 | 48 | 45 | 39 | 37 | 42 | 40 | 35 | 33 | 30 | 29 | 24 | 19 |  |    |  |   |
| 1.25    | 74          | 66 | 59  | 54 | 49  | 46 | 68  | 61 | 55 | 51 | 46 | 43 | 48 | 45 | 40 | 39 | 35 | 34 | 28 | 23 |  |    |  |   |
| 1.50    | 78          | 69 | 65  | 59 | 54  | 50 | 72  | 65 | 60 | 55 | 51 | 48 | 52 | 49 | 45 | 43 | 39 | 38 | 31 | 26 |  |    |  |   |
| 2.00    | 87          | 75 | 74  | 66 | 64  | 58 | 80  | 71 | 69 | 62 | 60 | 55 | 59 | 55 | 52 | 49 | 45 | 44 | 37 | 31 |  |    |  |   |
| 2.50    | 91          | 79 | 80  | 70 | 70  | 63 | 84  | 74 | 74 | 67 | 66 | 60 | 64 | 59 | 57 | 54 | 50 | 47 | 41 | 35 |  |    |  |   |
| 3.00    | 95          | 81 | 85  | 74 | 76  | 68 | 88  | 77 | 78 | 70 | 71 | 64 | 67 | 62 | 61 | 57 | 53 | 51 | 44 | 38 |  |    |  |   |
| 4.00    | 100         | 85 | 91  | 79 | 83  | 73 | 92  | 80 | 84 | 75 | 78 | 69 | 72 | 66 | 67 | 62 | 58 | 55 | 49 | 42 |  |    |  |   |
| 5.00    | 103         | 87 | 95  | 82 | 88  | 77 | 95  | 82 | 88 | 77 | 82 | 73 | 76 | 69 | 71 | 65 | 61 | 58 | 52 | 45 |  |    |  |   |
| 10.00   | 110         | 92 | 106 | 89 | 101 | 86 | 102 | 87 | 98 | 84 | 94 | 82 | 84 | 76 | 81 | 73 | 69 | 65 | 60 | 52 |  |    |  |   |

