


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDA5L-G/40W /2
光束	485 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

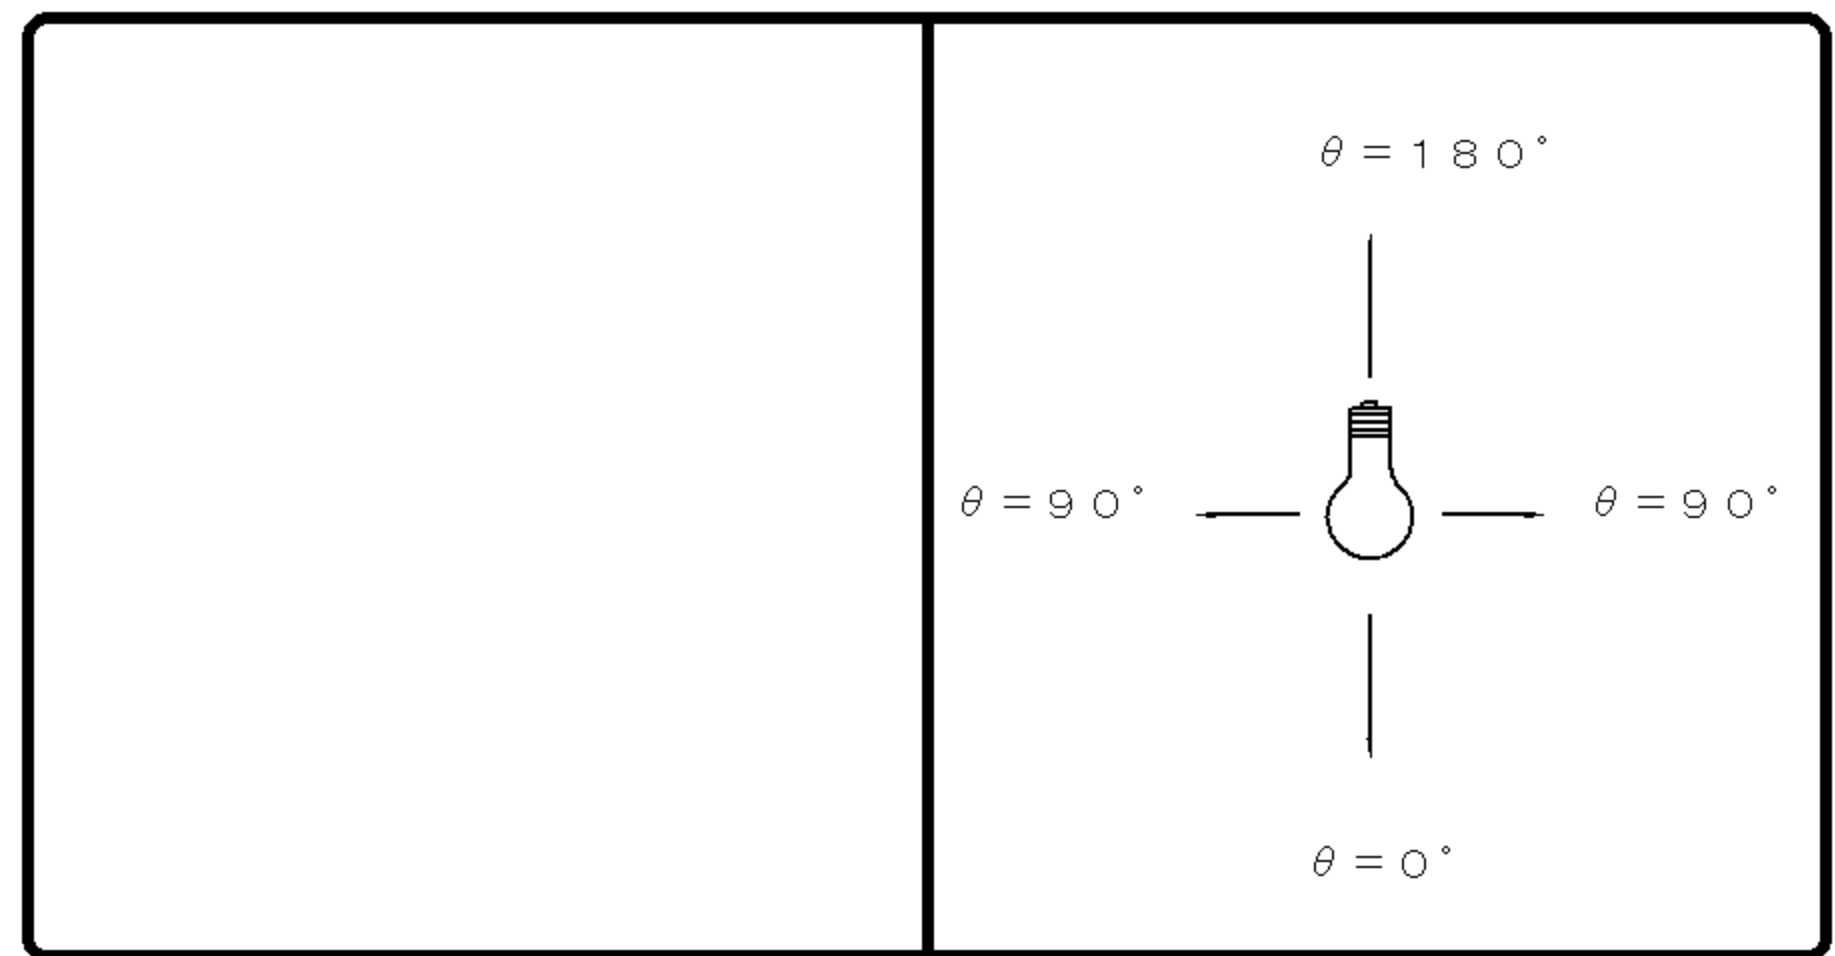

効 率	F	%
	F	%
	F	100 %
	器具 光束	485 lm

最大取付間隔	
A-A	1.59 H
B-B	1.59 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	104		
10°	105		
20°	106		
30°	107		
40°	108		
50°	108		
60°	105		
70°	101		
80°	95		
90°	88		
100°	79		
110°	69		
120°	60		
130°	50		
140°	40		
150°	31		
160°	22		
170°	5		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0								
	壁	70	50	30	70	50	30	70	50	30	50	30	30	10	0	30	10	0	30	10	0	30	10	0	30	10	0	30	10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30		
室指数	照明率 (×0.01)																															
0.60	50	46	36	34	27	26	47	43	33	32	25	25	29	28	22	22	19	19	14	10												
0.80	60	55	45	42	35	34	56	51	42	40	33	32	36	35	29	28	25	25	19	15												
1.00	67	60	52	48	42	40	62	56	48	45	39	37	42	40	34	33	30	29	23	18												
1.25	74	66	60	55	49	46	69	62	55	51	46	43	48	45	40	38	35	34	27	22												
1.50	79	70	65	59	55	51	73	65	60	55	51	48	52	49	44	42	38	37	31	25												
2.00	87	76	75	67	64	59	80	71	69	63	60	55	59	55	52	49	45	43	36	30												
2.50	92	80	81	71	71	64	85	75	75	67	66	60	64	59	57	54	49	47	40	34												
3.00	96	82	85	75	76	68	88	77	79	70	71	64	67	62	61	57	52	50	44	36												
4.00	101	86	92	80	84	74	93	81	85	75	78	70	73	66	67	62	57	55	48	41												
5.00	104	88	96	83	89	78	96	83	89	78	83	73	76	69	71	65	61	58	51	44												
10.00	112	93	107	90	102	87	103	88	99	85	95	82	84	76	81	73	69	65	59	51												

