


■ 東芝ランプ 配光データシート

名 称	LED電球ミニクリプトン形
形 名	LDA6L-G-E17 /S
光 束	380 lm × 1

保 守 率	良	1.00
	中	1.00
	否	1.00

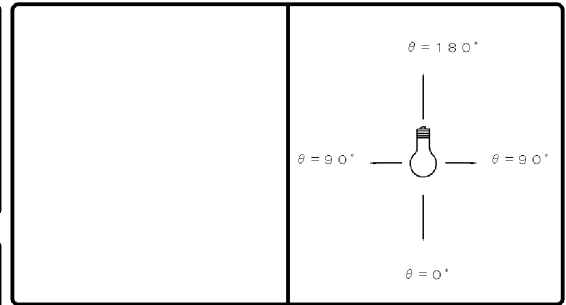

効 率	F	%
	F	%
	F	100 %
	器具 光束	380 lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備 考	データは初期の標準値です
--------	--------------

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	153		
10°	151		
20°	147		
30°	144		
40°	140		
50°	134		
60°	125		
70°	112		
80°	97		
90°	83		
100°	69		
110°	55		
120°	40		
130°	25		
140°	2		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照 明 率 (×0.01)																						
0.60	51	47	36	34	27	26	48	45	34	33	26	25	31	30	24	23	21	21	16	13			
0.80	61	55	45	43	35	34	57	52	43	41	34	33	39	37	31	30	28	27	22	18			
1.00	69	62	54	50	43	41	65	59	51	48	41	39	46	43	37	36	34	33	27	23			
1.25	76	68	61	56	50	47	71	64	58	54	48	45	52	49	44	42	39	38	32	28			
1.50	82	72	67	61	57	53	77	68	64	58	54	51	57	53	49	46	44	43	36	32			
2.00	90	78	77	69	67	61	84	74	72	66	63	58	64	60	57	54	51	49	43	38			
2.50	95	82	83	74	74	66	89	78	78	70	70	64	69	64	63	59	56	54	48	42			
3.00	99	85	88	77	79	71	92	81	83	74	75	68	73	67	67	62	60	57	51	46			
4.00	104	88	95	82	87	76	97	84	89	79	82	73	79	72	73	68	65	62	56	51			
5.00	107	91	99	85	92	80	100	87	93	82	87	77	82	75	77	71	69	65	60	54			
10.00	115	96	110	93	105	89	107	92	103	89	99	86	91	82	88	79	77	73	68	62			

