


# 東芝ランプ 配光データシート

名称	LED電球 ミニクリプトン形
形名	LDA6N-G-E17 /S
光束	530 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

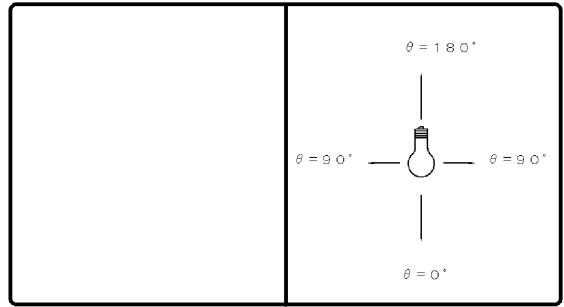

効率	F	%
	F	%
	F	100 %
	器具光束	530 lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

データは初期の標準値です

光度 (cd/1000lm)			
$\theta$	$\phi$	A-A	B-B C-C
0°		157	
10°		155	
20°		150	
30°		146	
40°		142	
50°		135	
60°		125	
70°		112	
80°		96	
90°		81	
100°		68	
110°		54	
120°		39	
130°		25	
140°		1	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20		0						
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0													
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数	照明率 (×0.01)																													
0.60	51	47	36	35	27	26	48	45	35	33	26	25	31	30	24	23	22	21	16	13										
0.80	61	55	46	43	36	34	57	52	43	41	34	33	39	37	31	30	28	28	22	19										
1.00	69	62	54	50	43	41	65	59	51	48	41	39	46	43	38	36	34	33	27	23										
1.25	76	68	61	56	51	47	71	64	58	54	48	46	52	49	44	42	40	38	32	28										
1.50	82	72	68	61	57	53	77	68	64	59	54	51	57	53	49	47	44	43	37	32										
2.00	90	78	77	69	67	61	84	74	73	66	63	59	65	60	57	54	51	49	43	38										
2.50	95	82	83	74	74	66	89	78	79	70	70	64	70	64	63	59	56	54	48	43										
3.00	99	85	88	77	79	71	93	81	83	74	75	68	74	68	67	63	60	58	52	46										
4.00	104	89	95	82	87	76	97	85	89	79	82	74	79	72	73	68	65	62	57	51										
5.00	107	91	99	85	92	80	100	87	93	82	87	77	82	75	78	71	69	66	60	54										
10.00	115	96	110	93	105	89	107	92	103	89	99	86	91	82	88	80	78	73	69	63										

