


東芝ランプ 配光データシート

名称	LED電球 ミニクリプトン形
形名	LDA6N-H-E17 /S
光束	620 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

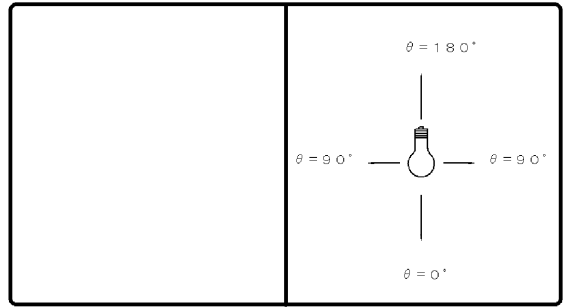

効率	F	%
	F	%
	F	100 %
	器具光束	620 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考
データは初期の標準値です

光度 (cd/1000lm)		A-A	B-B	C-C
θ	ϕ			
0°		276		
10°		273		
20°		263		
30°		244		
40°		215		
50°		178		
60°		136		
70°		98		
80°		67		
90°		43		
100°		26		
110°		16		
120°		10		
130°		6		
140°		1		
150°		1		
160°		0		
170°		0		
180°		0		

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	照明率 (×0.01)																			
0.60	57	53	42	40	33	32	55	51	41	39	33	32	39	37	31	31	30	29	25	22
0.80	68	61	53	49	43	41	65	59	51	48	42	40	48	46	40	39	38	38	33	30
1.00	77	69	62	57	52	49	73	67	60	56	50	48	56	53	48	46	46	45	40	37
1.25	84	75	70	64	60	56	80	72	67	62	58	55	63	59	55	53	53	51	46	43
1.50	90	79	76	69	66	61	86	77	74	68	64	60	69	64	61	58	58	56	51	48
2.00	98	85	86	77	76	70	93	83	83	75	74	68	77	71	70	66	66	64	59	55
2.50	103	89	92	81	83	75	98	86	89	80	81	74	82	76	76	71	71	68	64	60
3.00	107	91	97	85	89	79	102	89	93	83	86	78	86	79	80	75	75	72	68	64
4.00	111	95	103	89	96	85	106	92	99	87	93	83	91	84	86	80	81	77	73	69
5.00	114	97	108	92	101	88	109	94	103	90	98	87	95	86	91	83	84	80	76	73
10.00	121	101	117	99	113	96	115	99	112	97	108	94	102	93	100	91	92	87	84	80

