


東芝ランプ 配光データシート

名称	東芝LED電球
形名	LDA9N-G/80W
光束	1160 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

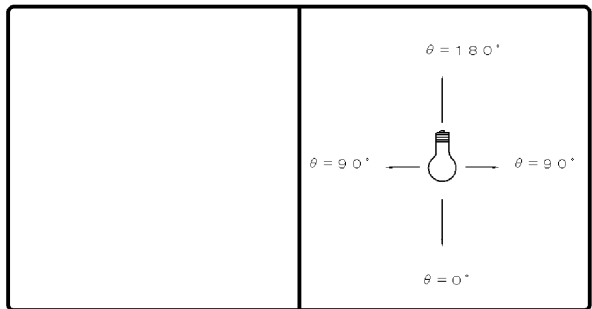

効率	F		%
	F		%
	F	100	%
	器具光束	1160	lm

最大取付間隔	
A-A	1.48 H
B-B	1.48 H

備考
データは初期の標準値です

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		113	
10°		113	
20°		112	
30°		112	
40°		110	
50°		108	
60°		104	
70°		98	
80°		92	
90°		84	
100°		75	
110°		66	
120°		57	
130°		48	
140°		39	
150°		31	
160°		24	
170°		19	
180°		0	

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30		70	50	30		50	30		50	30	30	10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		照明率 (×0.01)																		
0.60	50	46	35	33	26	25	46	42	33	31	25	24	28	27	21	21	19	18	13	10
0.80	59	53	44	41	34	33	54	50	41	38	32	31	35	34	28	27	24	24	18	14
1.00	67	60	52	48	41	39	61	56	48	45	39	37	41	39	34	33	29	29	23	18
1.25	73	65	59	54	48	45	68	61	55	51	45	43	47	44	40	38	34	33	27	22
1.50	79	69	65	59	54	50	72	65	60	55	51	48	52	48	44	42	38	37	31	25
2.00	86	75	74	66	64	58	80	70	68	62	59	55	59	55	52	49	45	43	36	30
2.50	91	79	80	71	70	63	84	74	74	66	66	60	63	59	57	53	49	47	40	34
3.00	95	82	85	74	76	68	88	77	78	70	71	64	67	62	61	57	52	50	44	37
4.00	100	85	91	79	83	73	92	80	84	74	77	69	72	66	67	62	57	54	48	41
5.00	103	87	95	82	88	77	95	82	88	77	82	73	75	69	71	65	60	57	51	44
10.00	110	92	106	89	101	86	102	87	98	84	94	81	83	75	80	73	68	65	59	51

