


東芝ランプ 配光データシート

名称	東芝電球型LEDランプ
形名	LDR100/200V 19N-H
光束	1600 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

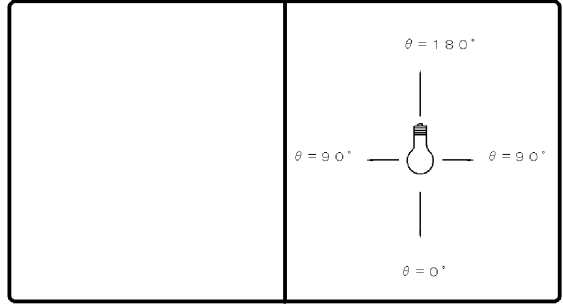

効率	F	%
	F	%
	F	100 %
	器具光束	1600 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

データは初期の標準値です。

光度 (cd/1000lm)		A-A	B-B	C-C
0°	φ	313		
10°		307		
20°		292		
30°		266		
40°		232		
50°		188		
60°		128		
70°		61		
80°		24		
90°		16		
100°		12		
110°		5		
120°		2		
130°		1		
140°		1		
150°		1		
160°		0		
170°		0		
180°		0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0							
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数	照明率 (×0.01)																							
0.60	54	50	41	39	33	32	52	48	40	38	33	32	39	37	32	31	31	31	26	25				
0.80	64	58	51	48	43	41	62	57	50	47	42	41	48	46	41	40	40	39	35	33				
1.00	72	65	60	56	51	49	70	63	58	55	50	48	56	53	49	47	47	46	42	40				
1.25	79	70	67	62	59	55	76	69	66	61	58	55	62	59	56	53	54	52	48	46				
1.50	84	74	73	66	65	60	81	73	71	65	64	60	68	63	61	58	59	57	53	51				
2.00	91	80	82	73	74	68	88	78	79	72	73	67	75	70	69	65	66	64	60	58				
2.50	96	83	87	77	80	72	92	81	85	76	78	72	80	74	75	70	71	68	65	62				
3.00	99	85	91	80	85	76	95	83	88	79	83	75	83	76	78	73	74	71	68	66				
4.00	103	87	97	84	91	80	99	86	93	82	89	79	87	80	84	77	79	75	72	70				
5.00	105	89	100	86	95	83	101	87	97	85	92	82	90	82	87	80	82	78	75	73				
10.00	110	92	107	91	105	89	106	91	103	89	101	88	96	87	94	85	88	83	81	79				

