


■ 東芝ランプ 配光データシート

名 称	LEDランプ
形 名	LDR12L-W/15OW
光 束	1000 lm × 1

保 守 率	良	1.00
	中	1.00
	否	1.00

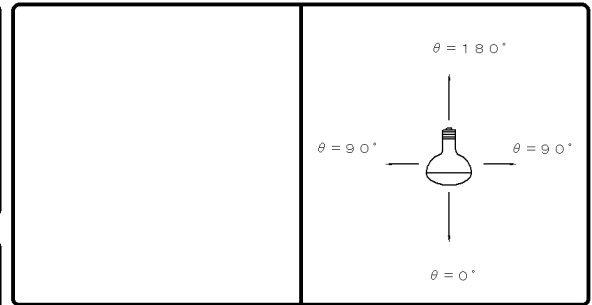

効 率	F		%
	F		%
	F	100	%
	器具 光束	1000	lm

最大取付間隔	
A-A	0.48H
B-B	0.48H

備 考	
--------	--

光度 (cd/1000lm)			
0°	3050	25°	503
1°	3045	30°	353
2°	3032	35°	226
3°	2992	40°	129
4°	2928	45°	62
5°	2825	50°	29
6°	2719	55°	15
7°	2575	60°	10
8°	2448	65°	7
9°	2285	70°	5
10°	2144	75°	3
11°	1962	80°	2
12°	1811	85°	1
13°	1632	90°	0
14°	1491		
15°	1328		
16°	1204		
17°	1064		
18°	960		
19°	850		
20°	773		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照 明 率 (×0.01)																						
0.60	108	99	100	95	95	92	106	99	99	94	94	91	97	94	93	91	92	91	89	88			
0.80	118	107	111	104	106	101	116	107	110	103	105	101	108	103	104	101	103	100	99	98			
1.00	120	108	112	104	107	102	118	107	111	104	106	101	109	103	105	101	103	100	99	98			
1.25	123	109	115	105	109	103	120	108	113	105	108	102	110	104	106	101	104	101	99	98			
1.50	125	110	118	107	112	104	122	109	116	106	111	104	112	105	108	103	105	102	100	99			
2.00	129	112	122	109	117	106	125	111	119	108	115	106	115	107	111	105	108	104	102	100			
2.50	131	113	125	110	120	108	127	112	122	110	118	108	117	108	113	106	109	105	103	102			
3.00	133	114	128	112	123	110	129	113	124	111	120	109	118	109	115	107	111	106	104	103			
4.00	136	115	132	114	128	112	132	114	128	113	125	111	121	111	119	110	114	108	107	105			
5.00	138	116	134	115	131	114	133	115	130	114	128	113	123	112	121	111	115	110	108	107			
10.00	142	118	140	118	139	118	137	117	136	117	135	117	127	115	127	115	120	113	112	110			

