


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDT4N-G/S/4OW
光束	485 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

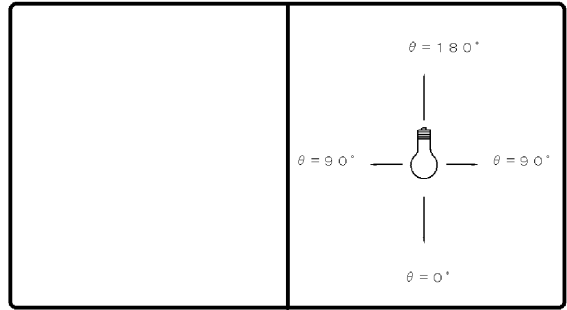

効 率	F	%
	F	%
	F	100 %
	器具 光束	485 lm

最大取付間隔	
A-A	2.1 H
B-B	2.1 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	66		
10°	73		
20°	84		
30°	94		
40°	101		
50°	105		
60°	105		
70°	101		
80°	95		
90°	90		
100°	84		
110°	78		
120°	69		
130°	58		
140°	44		
150°	30		
160°	15		
170°	3		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		30		10		0														
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10													
室指数	照 明 率 (×0.01)																																															
0.60	49	45	35	33	26	25	45	42	32	31	24	23	27	26	21	20	17	17	12	8																												
0.80	59	54	44	41	34	33	54	50	41	38	32	30	35	33	27	27	23	23	17	13																												
1.00	66	59	51	47	40	38	60	55	47	44	38	36	40	38	32	31	28	27	21	16																												
1.25	73	65	58	54	48	45	67	60	54	50	44	42	46	43	38	37	32	32	25	19																												
1.50	78	69	64	58	53	49	72	64	59	54	50	46	50	47	43	41	36	35	28	22																												
2.00	86	75	73	66	63	58	79	70	68	61	59	54	57	53	50	47	43	41	34	27																												
2.50	91	79	79	70	70	63	84	73	73	66	65	59	62	57	55	52	47	45	38	31																												
3.00	95	82	84	74	75	67	87	76	78	69	70	63	66	60	60	55	50	48	41	34																												
4.00	100	85	91	79	83	73	92	80	84	74	77	69	71	65	65	60	55	52	46	38																												
5.00	104	88	96	82	88	77	95	82	88	77	82	72	74	67	69	64	58	55	49	41																												
10.00	111	93	106	89	101	86	102	87	97	84	93	81	82	74	79	72	66	63	57	48																												

