



# 配光特性

図番 20160107-2



カタログ番号	YT42552		
使用ランプ	SORRA MR16-25D3000K		
ランプ光束	417.0	lm	1.000
最大光度	2767	cd	
1/2ビーム角			
A断面	19.00 °		
C断面			
B断面			

	角度	光度
	0°	2767
	10°	1246
	20°	235
	30°	23
	40°	11
	50°	10
	60°	6
	70°	3
	80°	1
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

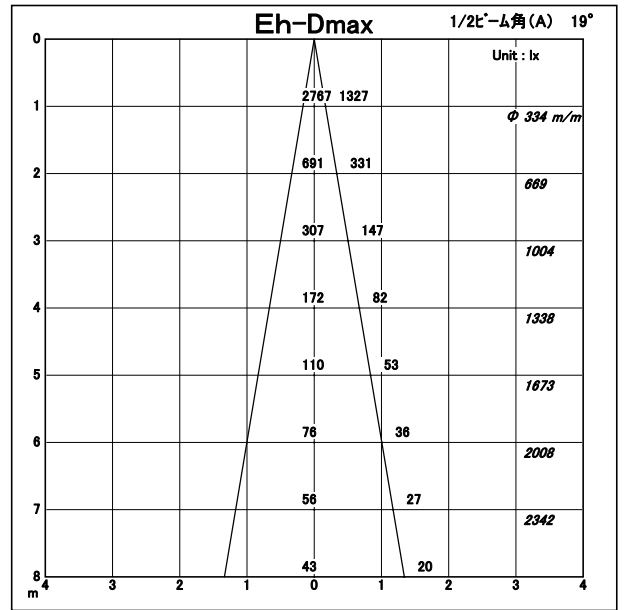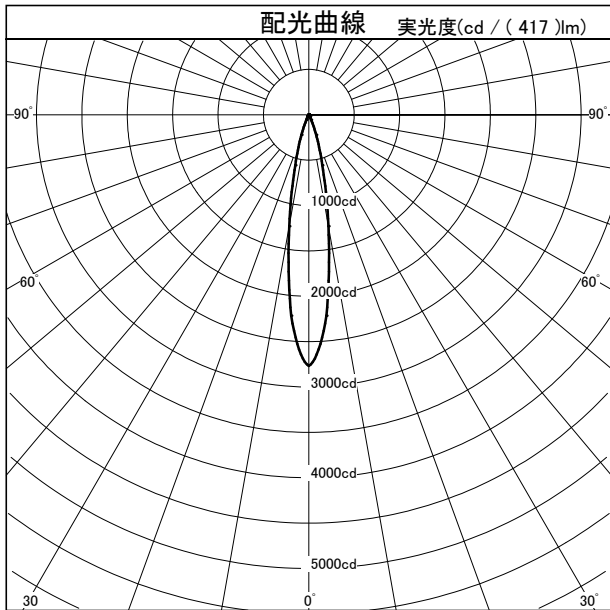

照明率表		平均照度=台数 * 照明率 * 保守率 * 417 (光束) / (間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.88	0.85	0.83	0.87	0.84	0.82	0.87	0.84	0.82	0.86	0.84	0.82	0.81
	0.70	0.94	0.90	0.87	0.93	0.89	0.87	0.92	0.89	0.87	0.91	0.88	0.86	0.85
	1.00	0.99	0.95	0.93	0.97	0.94	0.92	0.96	0.93	0.91	0.94	0.92	0.90	0.89
	1.25	1.02	0.98	0.96	1.00	0.97	0.94	0.98	0.95	0.93	0.96	0.94	0.92	0.91
	1.50	1.04	1.01	0.98	1.02	0.99	0.97	0.99	0.97	0.95	0.97	0.96	0.94	0.92
指	2.00	1.07	1.04	1.01	1.04	1.02	1.00	1.01	0.99	0.98	0.99	0.97	0.96	0.94
	2.50	1.09	1.06	1.04	1.06	1.03	1.02	1.03	1.01	0.99	1.00	0.99	0.97	0.95
	3.00	1.10	1.08	1.06	1.07	1.05	1.03	1.04	1.02	1.01	1.01	0.99	0.98	0.96
	4.00	1.12	1.10	1.08	1.08	1.07	1.05	1.05	1.04	1.02	1.01	1.01	1.00	0.97
	5.00	1.13	1.12	1.10	1.09	1.08	1.07	1.06	1.04	1.03	1.02	1.01	1.00	0.97
数	7.00	1.15	1.14	1.12	1.10	1.09	1.08	1.06	1.06	1.05	1.03	1.02	1.01	0.98
	10.00	1.16	1.15	1.14	1.11	1.11	1.10	1.07	1.06	1.06	1.03	1.03	1.02	0.99