


## RGB LED Tape 9VL4

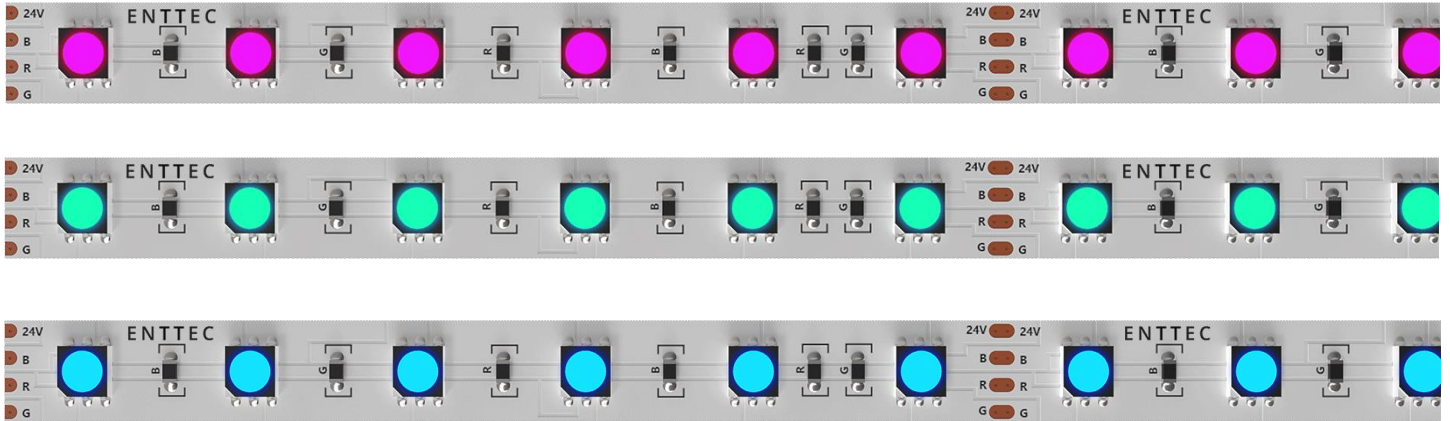

### Features

- High grade RGB leds for maximum colour vibrancy and longevity
- 12mm pitch
- Customized Length available
- 60pcs of RGB LEDs per meter
- High light output
- LEDs dimmable by ENTTEC CV Driver or DIN-LED4PX
- Can be joined together
- Can be cut to a smaller length
- Minimum cut length 100mm
- Input and output connections (loose cable)
- Constant Voltage control
- IP20 Indoor use only


Item	Value
<b>Input Voltage</b>	24V DC
<b>Max. power consumption (Watts per m)</b>	
<b>RGB (All)</b>	10.87
<b>Red</b>	4.45
<b>Green</b>	3.31
<b>Blue</b>	3.12
<b>Max. luminance (lm/m)</b>	
<b>Red</b>	66
<b>Green</b>	179
<b>Blue</b>	42.6
<b>CCT (all leds on)</b>	7000K
<b>Beam Angle</b>	120Deg
<b>Net Weight (g/m)</b>	30
<b>Connection (In/Out)</b>	Solder tabs
<b>Max. continuous length*</b>	10m
<b>IP Rating</b>	IP20
<b>PCB Color</b>	White
<b>White Temperature</b>	7000K

\* **Please Note:** Maximum continuous length before there is a significant voltage drop is 10m

**Please Note:** Operating the strip without a proper heat-sink can permanently damage the electronics and void the warranty. Several heatsink extrusions can be purchased from ENTTEC website.

### Specifications

## Physical Dimensions

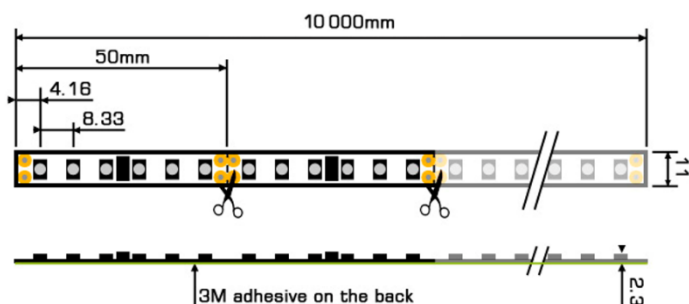

Due to continuous improvements and innovations of all ENTTEC products, specifications and features are subject to change without notice.

## Voltage Drop

Maximum continuous length before there is a significant voltage drop is 10m.

To run longer continuous lengths, power must be re-injected at every 10m of the tape. This will mitigate the expected voltage drop.

## Ordering Information

The ENTTEC RGB strips and compatible products can be ordered from our website or through your ENTTEC dealer.

Item	Name
9VL4-10	RGB LED Tape (24V) 10m reel
73520	ALEPH 1CV DRIVER (24V)
73526	XLR 4PIN TO SCREW TERMINAL OUTPUT CONVERTER

# enttec.com

MELBOURNE AUS / LONDON UK / RALEIGH-DURHAM USA