


# 東芝照明器具配光データシート

名称	蛍光防犯灯
形名	FK-32100P-P F1

保守率	良	0.70
	中	0.66
	否	0.63


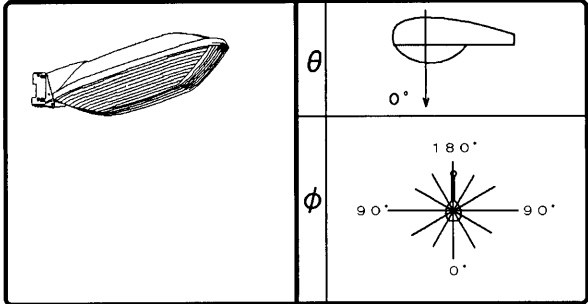


光源	名称	コンパクト形蛍光ランプ
	形名	FHT32EX-N
	光束	2400 lm × 1

効率	F $\frac{1}{2}$	7.3 %
	F $\frac{1}{4}$	54.2 %
	F $\bigcirc$	61.5 %
	器具光束	1476 lm

備考

前面	グローブ (プリズム)
反射面	鏡面処理

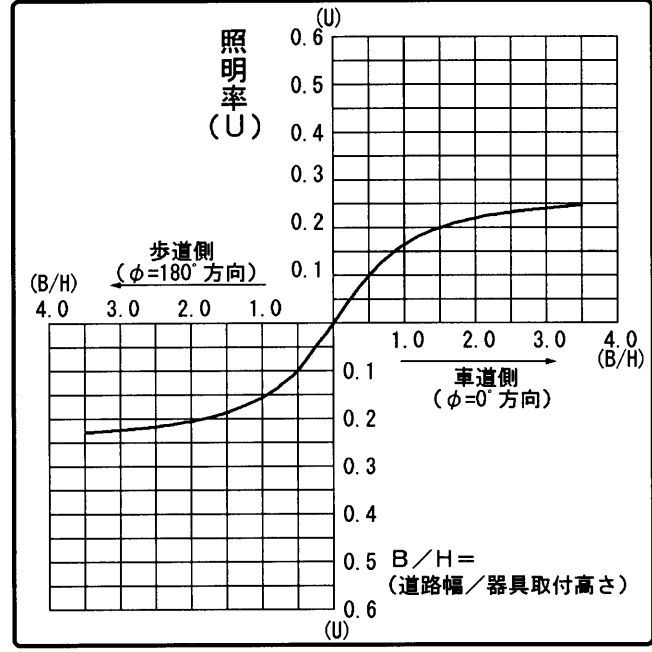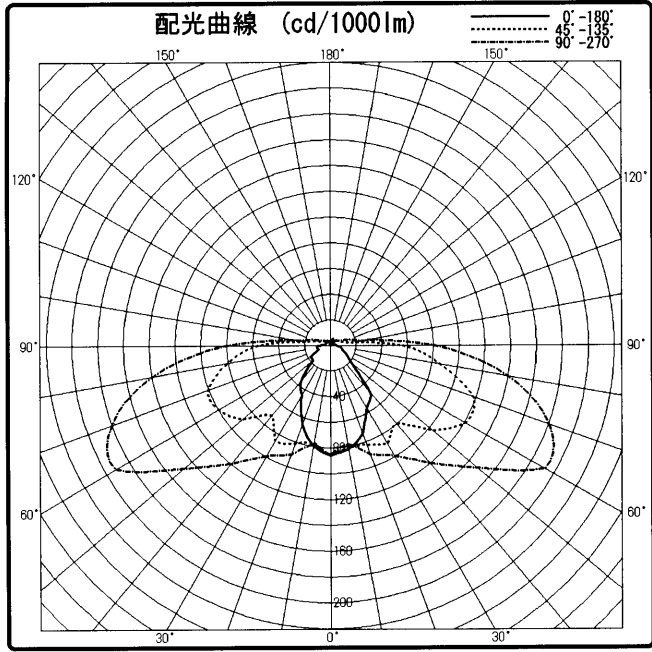

$\theta \backslash \phi$	0°	45°	90°	135°	180°
0°	85	85	85	85	85
10°	82	81	78	77	79
20°	73	82	90	81	65
30°	56	88	99	86	45
40°	49	79	120	71	36
50°	22	103	148	89	18
60°	14	121	192	100	18
70°	10	118	180	101	10
80°	8	86	140	81	11
90°	5	56	81	56	10
100°	5	15	24	19	5
110°	4	9	14	9	5
120°	3	6	9	7	3
130°	3	7	7	6	4
140°	4	6	5	5	4
150°	4	5	5	4	6
160°	6	5	4	4	4
170°	5	5	4	4	6
180°	0	0	0	0	0

