


東芝照明器具配光データシート

| | |
|----|--------------------|
| 名称 | 蛍光防犯灯 |
| 形名 | FK-36012C-G H15 |

| | | |
|-----|---|------|
| 保守率 | 良 | 0.78 |
| | 中 | 0.74 |
| | 否 | 0.70 |


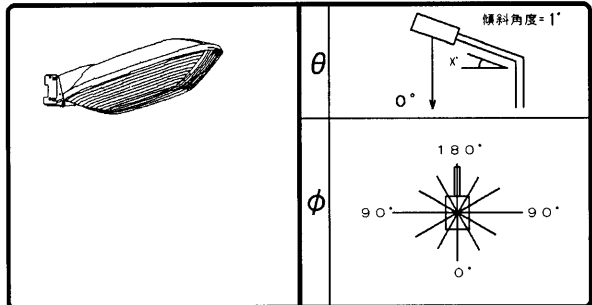


| | | |
|----|----|-------------|
| 光源 | 名称 | コンパクト形蛍光ランプ |
| | 形名 | FPL36EX-N |
| | 光束 | 2900 lm x 2 |

| | | |
|----|-----------------|---------|
| 効率 | F $\frac{1}{2}$ | 7.7 % |
| | F $\frac{3}{4}$ | 60.7 % |
| | F \bigcirc | 68.4 % |
| | 器具光束 | 3966 lm |

備考 ※取付傾斜角：0°

| | |
|-----|-------------|
| 前面 | グローブ (プリズム) |
| 反射面 | 塗装 (白) |

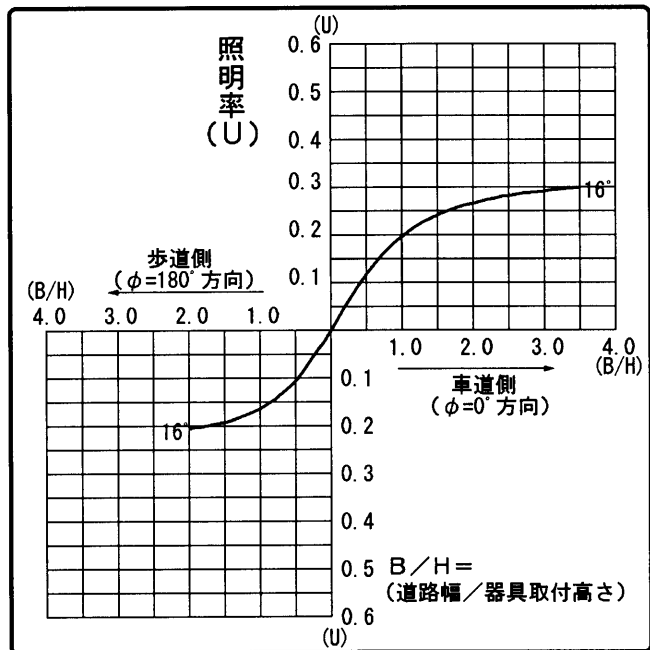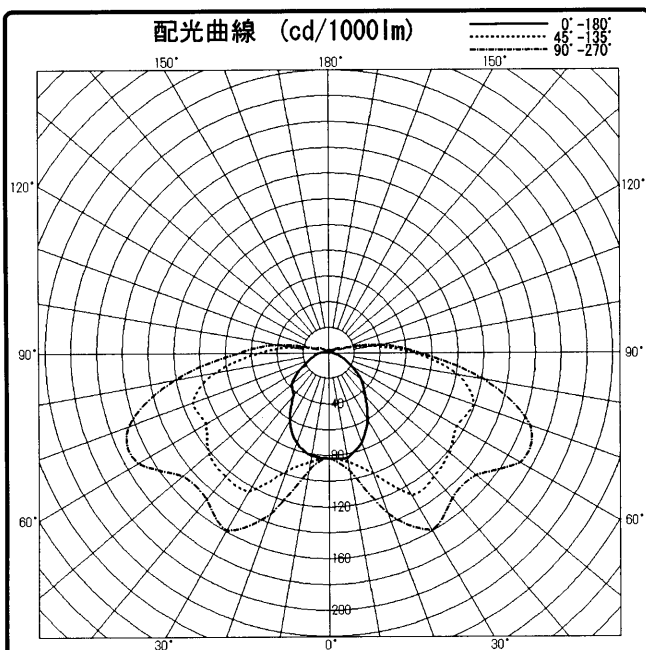

| $\theta \setminus \phi$ | 0° | 45° | 90° | 135° | 180° |
|-------------------------|----|-----|-----|------|------|
| 0° | 82 | 82 | 82 | 82 | 82 |
| 10° | 83 | 86 | 93 | 86 | 81 |
| 20° | 74 | 100 | 133 | 98 | 74 |
| 30° | 60 | 128 | 159 | 124 | 61 |
| 40° | 44 | 126 | 148 | 125 | 43 |
| 50° | 33 | 122 | 148 | 122 | 38 |
| 60° | 20 | 114 | 171 | 110 | 25 |
| 70° | 12 | 119 | 166 | 112 | 17 |
| 80° | 7 | 102 | 122 | 90 | 11 |
| 90° | 3 | 66 | 70 | 54 | 8 |
| 100° | 3 | 32 | 39 | 27 | 5 |
| 110° | 3 | 10 | 11 | 9 | 2 |
| 120° | 3 | 6 | 9 | 7 | 2 |
| 130° | 2 | 4 | 5 | 4 | 2 |
| 140° | 2 | 3 | 3 | 3 | 3 |
| 150° | 3 | 3 | 2 | 3 | 2 |
| 160° | 2 | 2 | 3 | 3 | 3 |
| 170° | 3 | 3 | 3 | 3 | 3 |
| 180° | 0 | 0 | 0 | 0 | 0 |

