


東芝照明器具配光データシート

名称	蛍光灯防犯灯
形名	FK-42100-PM

保守率	良	0.70
	中	0.66
	否	0.63


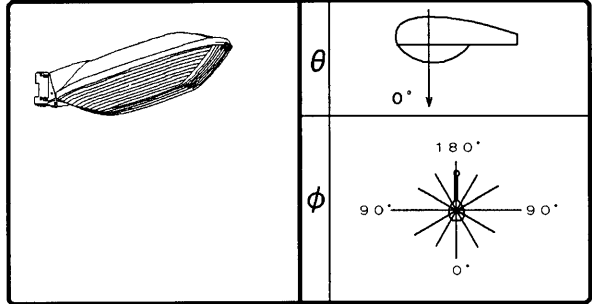


光源	名称	コンパクト形蛍光ランプ
	形名	FHT42EX-N
	光束	3200 lm x 1

効率	F $\frac{1}{2}$	8.4 %
	F $\frac{3}{4}$	51.3 %
	F \bigcirc	59.7 %
	器具光束	1911 lm

備考

前面	グローブ (プリズム)
反射面	鏡面処理

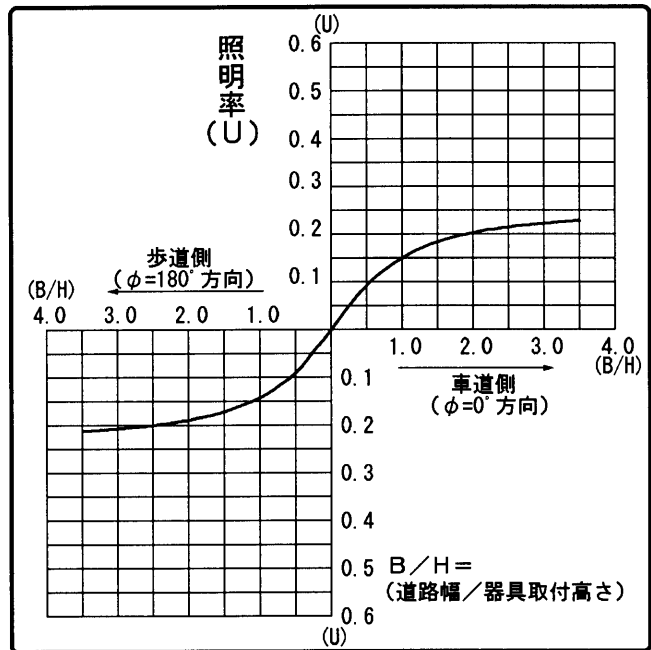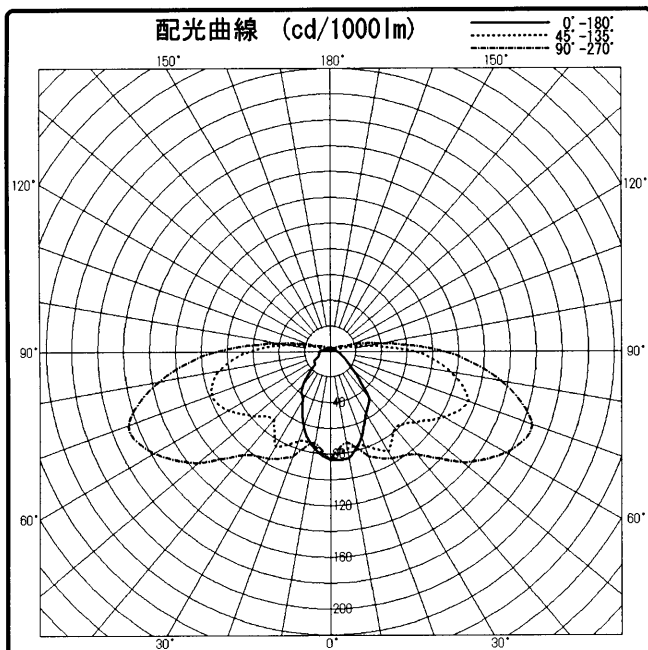

		光度 (cd/1000lm)				
$\theta \backslash \phi$		0°	45°	90°	135°	180°
0°		84	84	84	84	84
10°		84	77	72	74	76
20°		71	78	87	74	62
30°		55	90	96	85	43
40°		47	78	105	69	34
50°		24	86	134	78	16
60°		14	103	158	92	15
70°		10	114	167	98	10
80°		7	95	135	88	9
90°		6	66	89	63	9
100°		4	26	39	32	7
110°		4	7	15	9	3
120°		3	6	9	6	4
130°		4	5	7	4	3
140°		3	4	4	5	4
150°		3	4	3	3	3
160°		4	4	4	5	3
170°		4	3	3	3	3
180°		0	0	0	0	0

