

東芝照明器具配光データシート




名 称	蛍光灯防犯灯
形 名	FK-57100P-P F1

光源	名 称	コンパクト形蛍光ランプ
	形 名	FHT57EX-N
	光 束	4300 lm × 1

前 面	グローブ (プリズム)
反射面	鏡面処理

保守率	良	0.70
	中	0.66
	否	0.63

効 率	F 	11.0 %
	F 	55.9 %
	F 	66.9 %
	器具光束	2875 lm

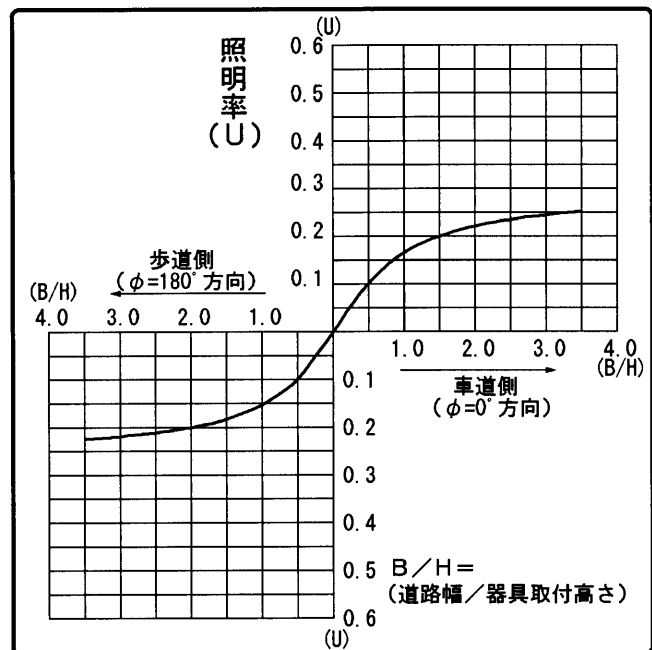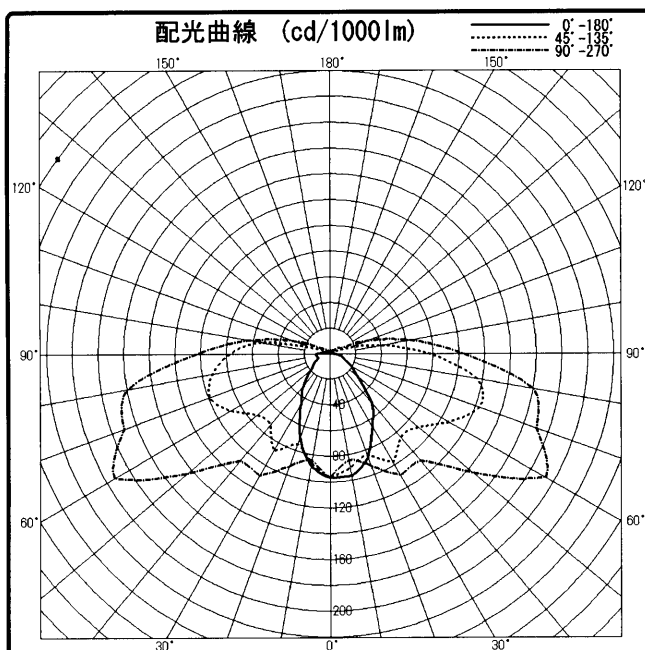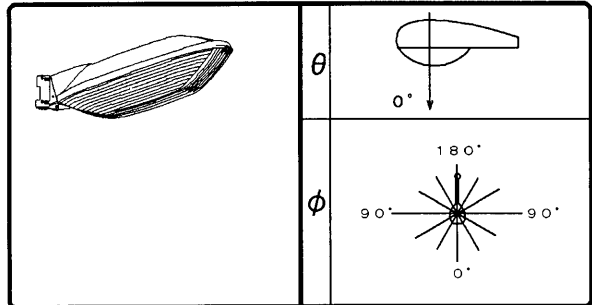

光度 (cd/1000lm)		0°	45°	90°	135°	180°
θ \ φ	0°	96	96	96	96	96
	10°	96	90	84	86	88
	20°	86	84	93	75	69
	30°	65	97	109	87	45
	40°	50	85	109	72	32
	50°	28	89	144	74	19
	60°	18	107	193	89	14
	70°	12	123	170	99	10
	80°	8	116	160	92	11
	90°	4	77	103	77	11
	100°	3	38	63	53	7
	110°	2	12	28	14	4
	120°	3	6	10	6	3
	130°	3	5	8	5	3
	140°	4	3	5	3	3
	150°	3	4	4	3	3
	160°	3	2	3	3	3
	170°	3	3	2	3	3
	180°	0	0	0	0	0

