


東芝照明器具配光データシート

名称	防犯灯
形名	HB-0755PHC -A

保守率	良	0.83
	中	0.78
	否	0.74


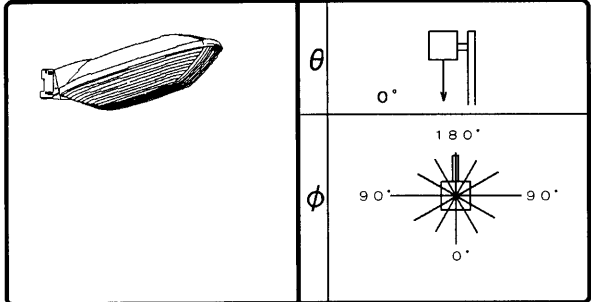


光源	名称	HL-ネオルックス
	形名	NH75F・L
	光束	6750 lm × 1

効率	F $\frac{1}{2}$	6.7 %
	F $\frac{1}{4}$	55.5 %
	F \bigcirc	62.2 %
	器具光束	4197 lm

備考

前面	グローブ (プリズム)
反射面	鏡面処理

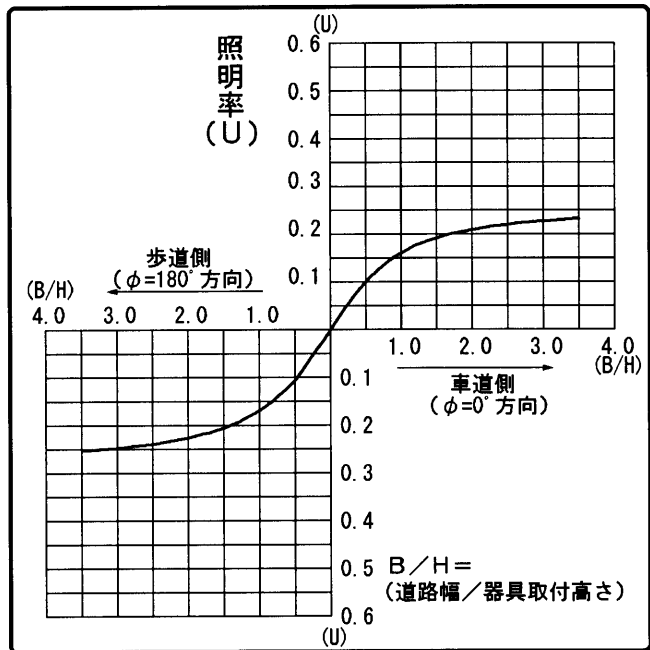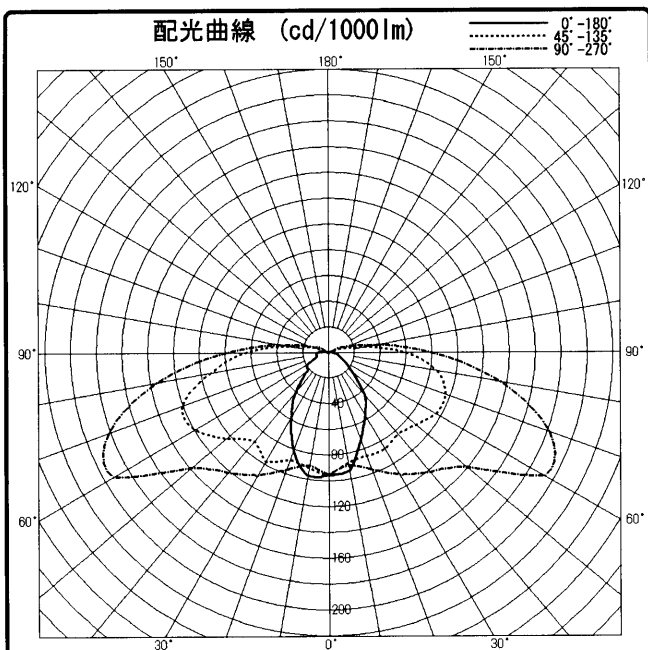

$\theta \backslash \phi$	0°	45°	90°	135°	180°
0°	95	95	95	95	95
10°	93	87	89	91	97
20°	72	86	97	89	81
30°	56	87	110	98	58
40°	43	83	122	90	40
50°	23	88	139	104	22
60°	15	96	193	120	20
70°	8	96	181	121	10
80°	7	85	136	93	10
90°	4	59	79	64	9
100°	2	26	36	30	6
110°	2	6	12	9	2
120°	3	4	9	5	2
130°	0	0	0	0	0
140°	0	0	0	0	0
150°	0	0	0	0	0
160°	0	0	0	0	0
170°	0	0	0	0	0
180°	0	0	0	0	0

