


東芝照明器具配光データシート


名 称	水銀防犯灯
形 名	HB-08055HC-A

保守率	良	0.77
	中	0.73
	否	0.69


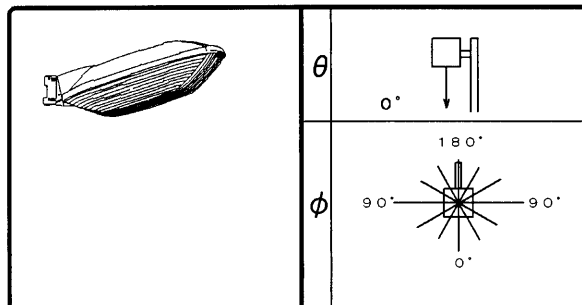


光源	名 称	水銀ランプ
	形 名	HF80X
	光束	3300 mm × 1

効 率	F $\frac{1}{2}$	7.8 %
	F $\frac{1}{4}$	57.0 %
	F $\bigcirc$	64.8 %
	器具光束	2138 lm

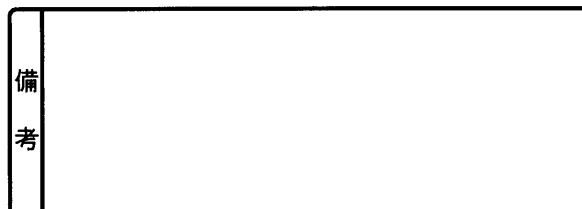

前 面	グローブ (プリズム)
反射面	電解研磨

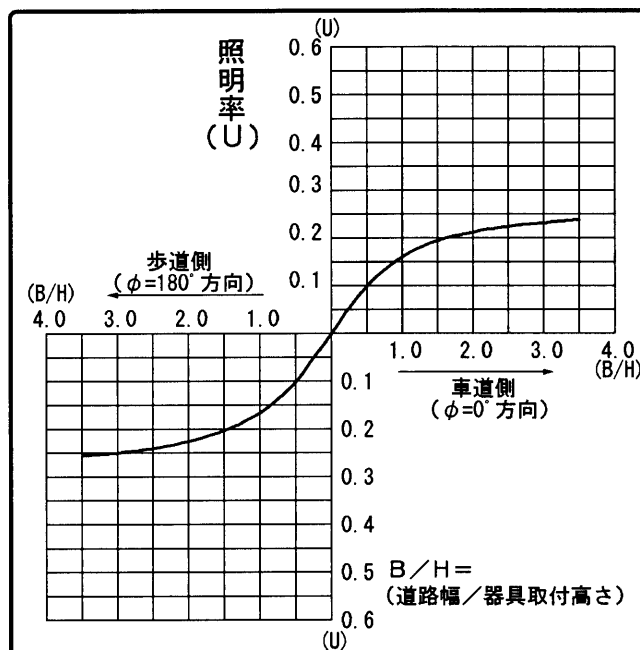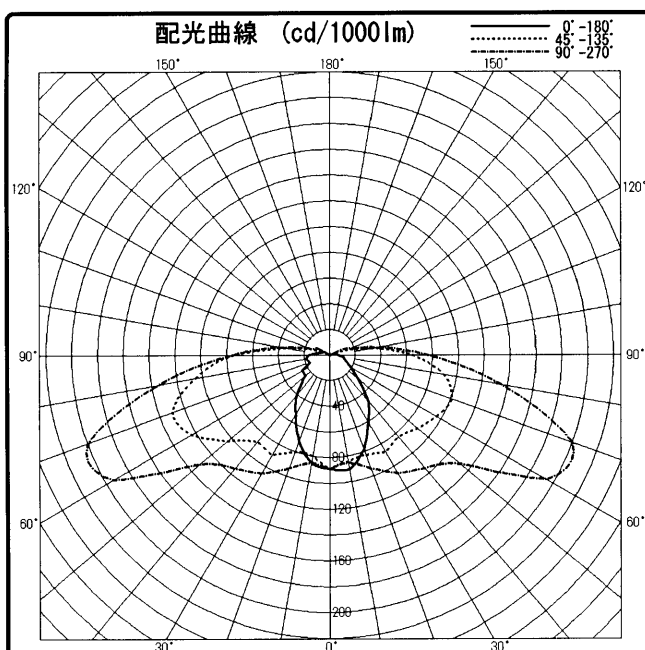

光度 (cd/1000lm)					
θ \ φ	0°	45°	90°	135°	180°
0°	88	88	88	88	88
10°	90	84	85	80	85
20°	78	83	94	80	71
30°	60	87	106	90	53
40°	47	83	115	88	40
50°	29	89	132	104	25
60°	19	96	194	124	25
70°	13	101	200	130	17
80°	11	90	136	106	19
90°	7	64	76	75	17
100°	4	32	37	32	11
110°	4	10	15	11	5
120°	4	5	11	8	5
130°	0	0	0	0	0
140°	0	0	0	0	0
150°	0	0	0	0	0
160°	0	0	0	0	0
170°	0	0	0	0	0
180°	0	0	0	0	0

