


# 東芝照明器具配光データシート

名称	水銀防犯灯
形名	HB-10055PHC -A

保守率	良	0.77
	中	0.73
	否	0.69


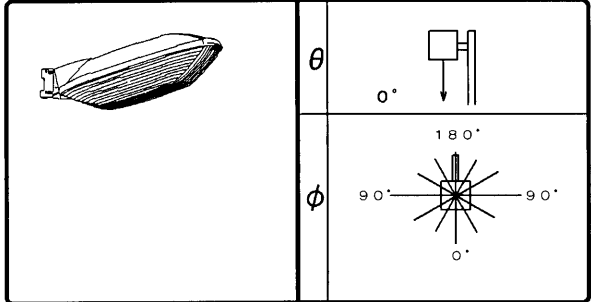


光源	名称	水銀ランプ
	形名	HF100X
	光束	4200 lm x 1

効率	F $\frac{1}{2}$	6.3 %
	F $\frac{1}{4}$	58.5 %
	F $\bigcirc$	64.8 %
	器具光束	2722 lm

備考

前面	グローブ (プリズム)
反射面	鏡面処理

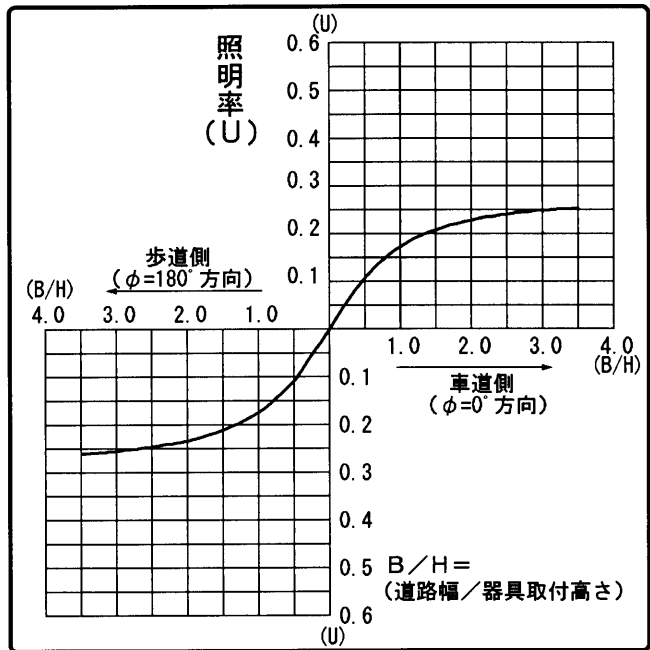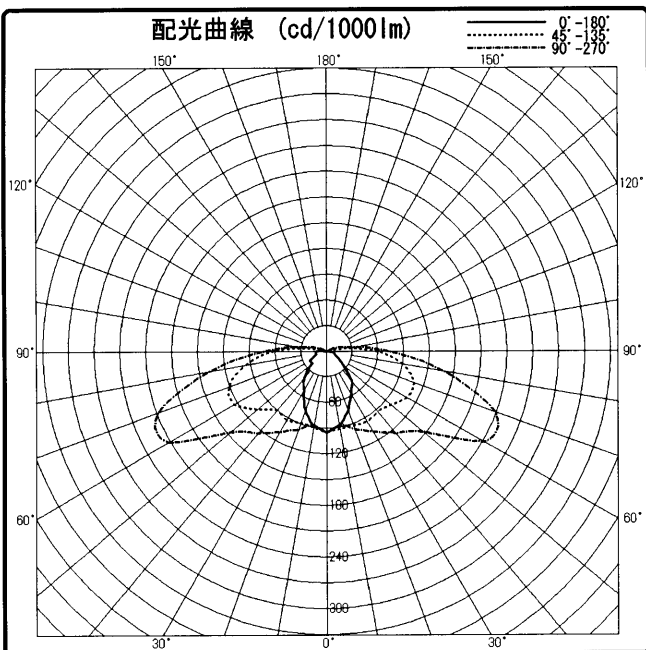

$\theta \backslash \phi$	0°	45°	90°	135°	180°
0°	95	95	95	95	95
10°	87	92	87	90	88
20°	74	92	97	89	73
30°	58	95	109	93	53
40°	46	93	125	90	40
50°	26	98	146	106	22
60°	15	109	213	124	23
70°	10	108	209	121	13
80°	8	90	140	96	13
90°	5	59	73	63	12
100°	3	22	31	24	8
110°	1	7	11	9	3
120°	2	4	10	6	3
130°	0	0	0	0	0
140°	0	0	0	0	0
150°	0	0	0	0	0
160°	0	0	0	0	0
170°	0	0	0	0	0
180°	0	0	0	0	0

