

東芝照明器具配光データシート


名 称	東芝LED防犯灯
形 名	LEDK-78926W-LS1

光 源	名 称	LED
	形 名	LED
	光 束	790 lm × 1



前 面	グローブ (透明つや消し仕上げ)
反射面	

良	0.69
中	0.67
否	0.63

効 率	F $\frac{1}{2}$	1.5 %
	F $\frac{1}{4}$	98.5 %
	F $\bigcirc$	100 %
器具 光束		790 lm

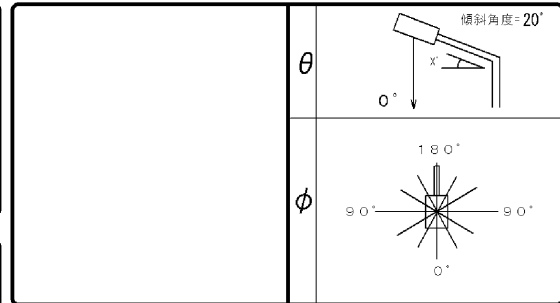

備 考	
-----	--

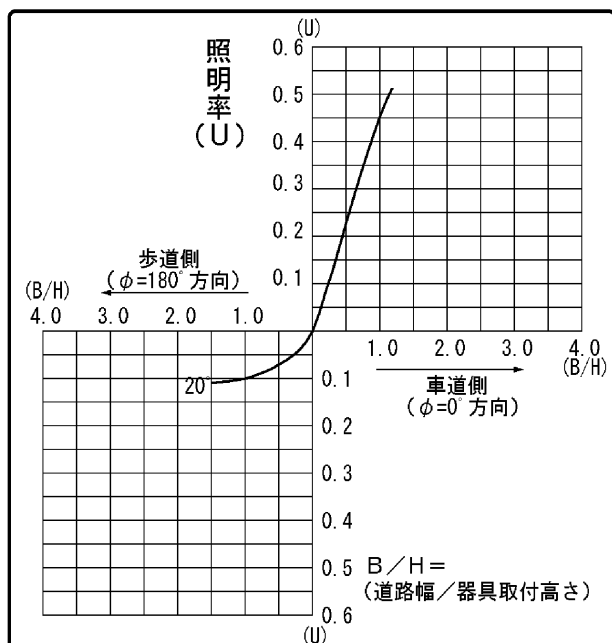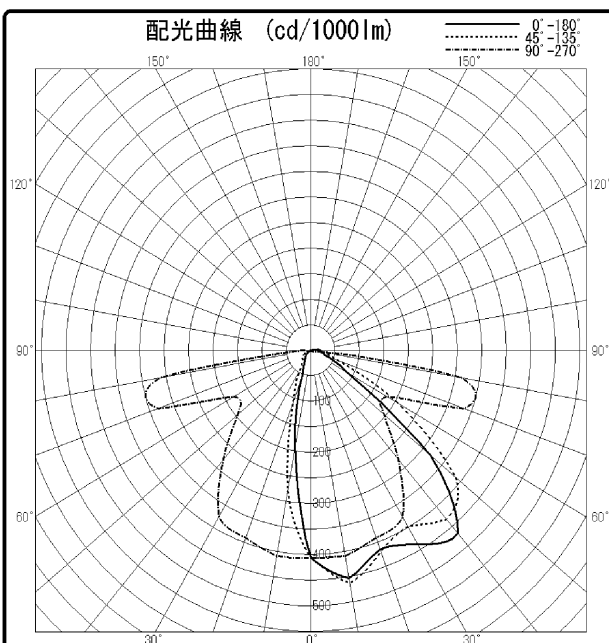

		光度 (cd/1000lm)				
$\theta \backslash \phi$		0°	45°	90°	135°	180°
0°		405	405	405	405	405
10°		452	461	408	277	190
20°		414	420	390	108	52
30°		438	398	377	46	29
40°		468	431	279	26	22
50°		321	387	197	23	14
60°		88	206	182	18	7
70°		32	61	333	12	2
80°		25	24	314	2	1
90°		20	19	21	0	0
100°		13	16	1	0	0
110°		7	3	0	0	0
120°		1	0	0	0	0
130°		0	0	0	0	0
140°		0	0	0	0	0
150°		0	0	0	0	0
160°		0	0	0	0	0
170°		0	0	0	0	0
180°		0	0	0	0	0

