


姿図

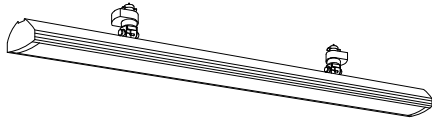

| | |
|--------|-----------------|
| 品番 | LZB-90789AWE |
| 光源 | LED 56W (3500K) |
| 定格光束 | 5070 lm |
| 1/2照度角 | 61° |
| ビーム角 | 92° |

| | |
|-------------------------|----------------------|
| 器具効率 | 100.0 % |
| 上方光束 | 0.0 % |
| 下方光束 | 100.0 % |
| 器具間隔 最大限 (取付高さ H) | A 1.17 H B 1.17 H |
| 保守率 | 良 0.63 |
| | 中 0.60 |
| | 否 0.53 |

| 反射率 (%) | 天井 | 80 | | | 70 | | | 50 | | | 30 | | | 0 |
|---------|------------------|----|----|----|----|----|----|----|----|----|----|----|----|---|
| | 壁 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| | 床 | 20 | | | 20 | | | 20 | | | 20 | | | 0 |
| 室指数 | 照 明 率 (× 0.01) | | | | | | | | | | | | | |
| 0.6 | 47 | 40 | 34 | 46 | 39 | 34 | 45 | 39 | 34 | 44 | 38 | 34 | 32 | |
| 0.8 | 56 | 49 | 43 | 55 | 48 | 43 | 54 | 47 | 43 | 52 | 47 | 42 | 40 | |
| 1 | 64 | 56 | 51 | 63 | 56 | 50 | 61 | 55 | 50 | 59 | 54 | 49 | 47 | |
| 1.25 | 71 | 64 | 58 | 70 | 63 | 58 | 68 | 62 | 57 | 66 | 60 | 56 | 54 | |
| 1.5 | 76 | 69 | 64 | 75 | 69 | 63 | 73 | 67 | 62 | 70 | 65 | 61 | 59 | |
| 2 | 84 | 78 | 73 | 83 | 77 | 72 | 80 | 75 | 71 | 77 | 73 | 70 | 66 | |
| 2.5 | 89 | 84 | 79 | 88 | 83 | 78 | 84 | 80 | 77 | 81 | 78 | 75 | 71 | |
| 3 | 93 | 88 | 84 | 91 | 87 | 83 | 88 | 84 | 81 | 85 | 82 | 79 | 75 | |
| 4 | 97 | 93 | 90 | 95 | 92 | 89 | 92 | 89 | 86 | 88 | 86 | 84 | 80 | |
| 5 | 100 | 97 | 94 | 98 | 95 | 92 | 94 | 91 | 89 | 90 | 88 | 87 | 82 | |

