
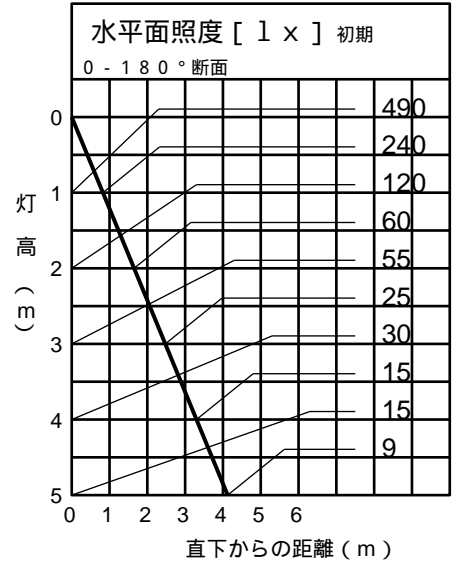
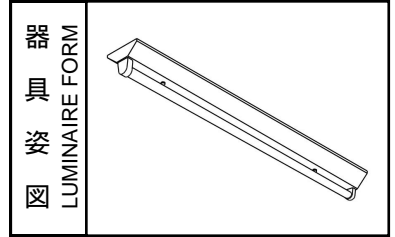


UNIT : cd/1000 lm

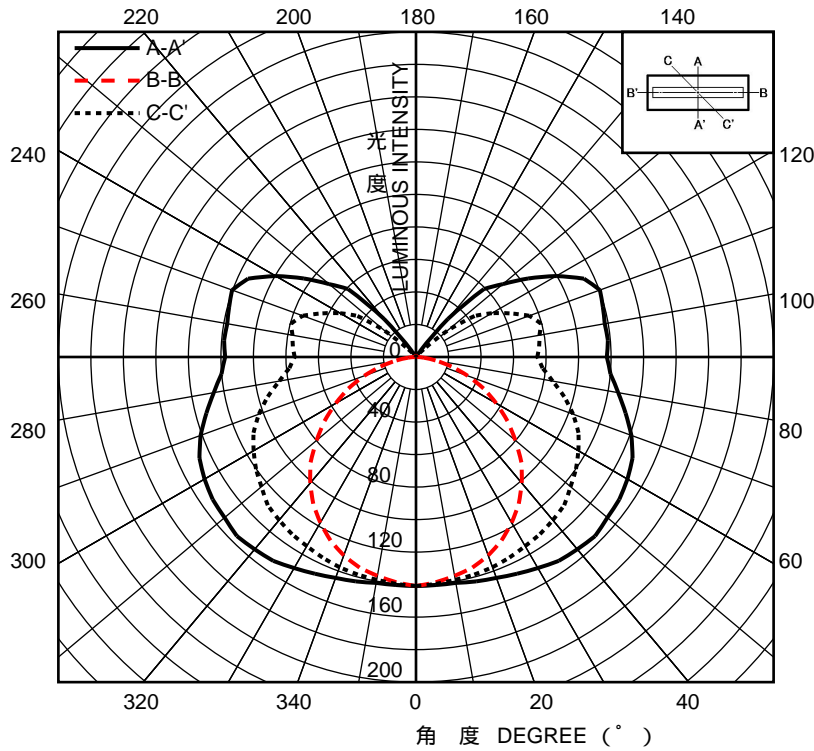

(単位 : %)

反射率 (%) REFLECTANCE	天井	80			70			50			30			0
	壁	70	50	30	70	50	30	70	50	30	70	50	30	0
室指数 (Kr) ROOM INDEXES	床	10			10			10			10			0
	0.60	46	34	26	43	32	25	38	29	23	34	26	21	13
Kr = $\frac{XY}{H(X+Y)}$	0.80	54	42	34	50	40	32	45	36	30	39	32	27	18
	1.00	60	48	40	56	46	39	50	41	35	44	37	32	23
BZ 7	1.25	65	54	46	61	51	44	54	46	40	48	41	36	26
	1.50	69	59	51	65	56	49	58	51	45	51	45	41	30
最大取付間隔 MAX SPACING	2.00	74	66	59	70	63	56	63	56	51	56	51	47	36
	2.50	78	70	64	74	67	61	66	61	56	59	54	51	40
A-A' 1.65 B-B' 1.20 H	3.00	80	73	68	76	70	65	68	63	59	61	57	54	43
	4.00	83	78	73	79	74	70	72	68	64	64	61	58	47
備考 REMARK	5.00	86	81	77	81	77	73	74	70	67	66	64	61	50
	7.00	88	84	81	84	81	78	76	74	71	69	67	65	53
	10.00	90	87	85	86	84	81	78	76	74	71	69	68	57

器具形式 LUMINAIRE TYPE	FHV32101EFN9	器具効率 LUMINAIRE EFFICIENCY	上方 UPPER	26.0 %	器具名称 LUMINAIRE DESIGNATION	配光特性 LUMINOUS INTENSITY DISTRIBUTION 一般蛍光灯器具
光源形式 LAMP TYPE	FHF32EX-N-H		下方 LOWER	67.5 %		
光源光束 LAMP FLUX	3520 lm	総計 TOTAL	93.5 %	図番 SHEET NO.	DY001679	
備考 REMARK	PJ 9					

